


Specification Sheet

Part Number: 156-00455

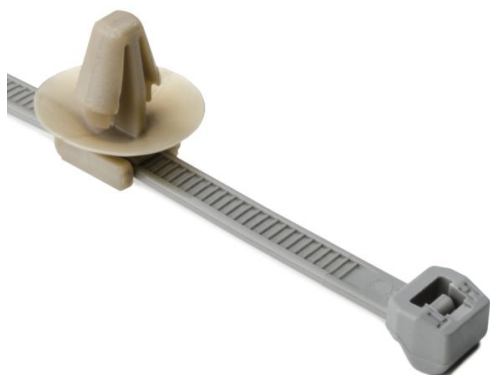

2-Piece Cable Tie/Arrowhead Mount, 7.9" Long, 50lb Tensile, .25"-.26" Hole, .03"-.05" Pnl, PA46/PEEK, Gray/Bge, 100/pkg

Article Number	156-00455
Type	T50ROSP1SFT6.5
Color	Gray (GY) Beige (BGE)
Features & Benefits	<ul style="list-style-type: none">• The arrowhead design of this push mount offers a low insertion force and a high extraction force.• Integrated cap keeps out debris.
Quantity Per	bag
Product Description	The Arrowhead Mount Tie is a two-piece bundling and fastening solution that delivers strong extraction force. The disc blocks debris ingress through the mounting hole. This convenient combination is used in many markets, including automobile, aircraft and appliance.

Short Description	2-Piece Cable Tie/Arrowhead Mount, 7.9" Long, 50lb Tensile, .25"-.26" Hole, .03"-.05" Pnl, PA46/PEEK, Gray/Bge, 100/pkg
Global Part Name	T50ROSP1SFT6.5-PA46/PEEK-GY/BGE
Minimum Tensile Strength (Imperial)	50.0
Minimum Tensile Strength (Metric)	225.0
Length L (Imperial)	7.9
Length L (Metric)	200.0
Fixation Method	Arrowhead
Identification Plate Position	none
Tie Closure	plastic pawl
Variant	Outside Serrated
Width W (Imperial)	0.18
Width W (Metric)	4.6
Bundle Diameter Min (Imperial)	0.04
Bundle Diameter Min (Metric)	1.0
Bundle Diameter Max (Imperial)	1.8

Bundle Diameter Max (Metric)	45.0
Thickness T (Imperial)	0.05
Thickness T (Metric)	1.3
Height H (Imperial)	0.59
Height H (Metric)	15.0
Panel Thickness Min(Imperial)	0.03
Panel Thickness Max(Imperial)	0.05
Panel Thickness Min (Metric)	0.7
Panel Thickness Max (Metric)	1.3
Mounting Hole Diameter D (Imperial)	0.25 - 0.26
Mounting Hole Diameter D (Metric)	6.3 - 6.7 mm
Mounting Hole Diameter D Min (Imperial)	0.25
Mounting Hole Diameter D Max (Imperial)	0.26
Mounting Hole Diameter D Max (Metric)	6.7
Disc Diameter(Metric)	16.0
Disc Diameter (Imperial)	0.63

Material	Polyetheretherketone (PEEK) Polyamide 4.6 (PA46)
Material Shortcut	PA46 PEEK
Material Cable Tie	Polyamide 4.6 (PA46)
Flammability	UL 94 V0 UL 94 V2
Operating Temperature (Metric)	-40°F to +266°F (-40°C to +130°C) -67°F to +464°F (-55°C to +240°C)
Reach Complaint(Article 33)	Yes
ROHS Complaint	Yes
Package Quantity(Imperial)	100
Package Quantity (Metric)	100
Customs Number	3926909988
Content Unit(BMEcat)	pcs.
Weight (Metric)	1.4