


## Specification Sheet

Part Number: 157-00368

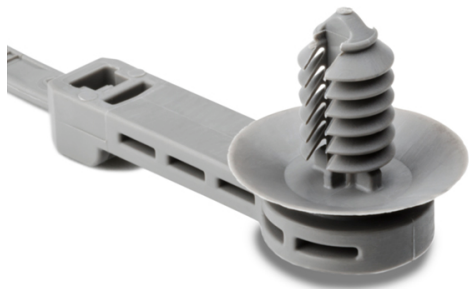

1-Pc Cable Tie/Fir Tree Mount with Disc, 25mm Offset; 9.1"L, 6.1-7mm Hole, PA66HIRHS, Gray, 500/pkg

**Article Number** 157-00368

**Type** T50ROSFT6SO25A

**Color** Gray (GY)

### Features & Benefits

- One-piece cable tie and fixing offers a simple and easy to use method of bundling and fixing cables, through the design of the fir tree by ensuring positive and secure fixing into panels with thicknesses from 0.6-6.65mm.
- The offset on the cable tie creates an alternate solution when an offset fixing option is required and a tape clip cannot be used due to the design which reduces the potential of the bundle flexing or shifting.
- The 'disc' on the top of the fir tree covers the hole and minimizes the ingress of water and dirt.

**Quantity Per** bag

<b>Product Description</b>	HellermannTyton's Off-Set Fir Tree Cable Tie and fixing offers a simple and easy to use method of bundling and fixing cables, the design of the fir tree ensures a positive and secure fixing into panels with thicknesses from .2" - .26" or threaded blind holes. The 'disc' on the top of the fir tree covers the hole and minimizes the ingress of water and dirt.
<b>Short Description</b>	1-Pc Cable Tie/Fir Tree Mount with Disc, 25mm Offset; 9.1"L, 6.1-7mm Hole, PA66HIRHS, Gray, 500/pkg
<b>Global Part Name</b>	T50ROSFT6SO25A-PA66HIRHS-GY
<b>Minimum Tensile Strength (Imperial)</b>	50.0
<b>Minimum Tensile Strength (Metric)</b>	225.0
<b>Length L (Imperial)</b>	9.1
<b>Length L (Metric)</b>	230.0
<b>Offset Length(Imperial)</b>	0.98
<b>Offset Length(Metric)</b>	25.0
<b>Fixation Method</b>	Fir Tree
<b>Identification Plate Position</b>	none
<b>Releasable Closure</b>	No
<b>Width W (Imperial)</b>	0.20
<b>Width W (Metric)</b>	5.1

<b>Bundle Diameter Min (Imperial)</b>	0.08
<b>Bundle Diameter Min (Metric)</b>	2.0
<b>Bundle Diameter Max (Imperial)</b>	1.97
<b>Bundle Diameter Max (Metric)</b>	50.0
<b>Height H (Imperial)</b>	0.89
<b>Height H (Metric)</b>	21.2
<b>Panel Thickness Min(Imperial)</b>	0.02
<b>Panel Thickness Max(Imperial)</b>	0.26
<b>Panel Thickness Min (Metric)</b>	0.6
<b>Panel Thickness Max (Metric)</b>	6.65
<b>Mounting Hole Diameter D (Imperial)</b>	0.24 - 0.28 ";0.24 - 0.26
<b>Mounting Hole Diameter D (Metric)</b>	6.35 mm (hexagonal) 6.1 - 7.0 mm
<b>Mounting Hole Diameter D Min (Imperial)</b>	0.24
<b>Mounting Hole Diameter D Max (Imperial)</b>	0.28 ";0.26
<b>Mounting Hole Diameter D Max (Metric)</b>	7.0
<b>Disc Diameter(Metric)</b>	19.0
<b>Disc Diameter (Imperial)</b>	0.75

<b>Material</b>	Polyamide 6.6, high impact modified, heat stabilized (PA66HIRHS)
<b>Material Shortcut</b>	PA66HIRHS
<b>Operating Temperature (Metric)</b>	-40°F to +230°F (-40°C to +110°C)
<b>ROHS Complaint</b>	Yes
<b>Package Quantity(Imperial)</b>	500
<b>Package Quantity (Metric)</b>	500
<b>Customs Number</b>	3926909988