


R46 310 VAC, Film, Metallized Polypropylene, Safety, 4.7 uF, 10%, 310 VAC (X2), 630 VDC, 110°C, Lead Spacing = 37.5mm

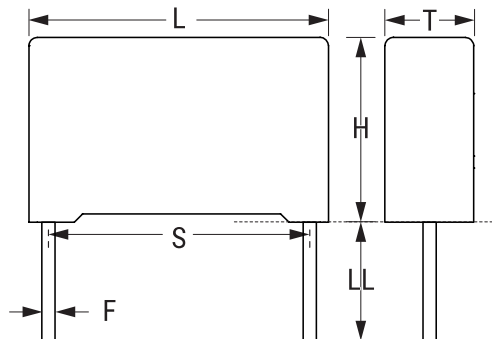

General Information	
Series:	R46 310 VAC
Dielectric:	Metallized Polypropylene
Style:	Radial
Features:	EMI Safety
RoHS:	Yes
Lead:	Wire Leads
Qualifications:	ENEC, UL, cUL, CQC
AEC-Q200:	No

Dimensions	
L	41.5mm +0.3/-0.7mm
H	32mm +0.1/-0.7mm
T	19mm +0.3/-0.7mm
S	37.5mm +/-0.4mm
LL	30mm +5mm
F	1mm +/-0.05mm

Specifications	
Capacitance:	4.7 uF
Capacitance Tolerance:	10%
Voltage AC:	310 VAC (X2)
Voltage DC:	630 VDC
Temperature Range:	-40/+110°C
Rated Temperature:	110°C
Dissipation Factor:	0.1% 1kHz
Insulation Resistance:	6.383 GOhms
Max dV/dt:	100 V/us
Safety Class:	X2

Packaging Specifications	
Packaging:	Tray
Packaging Quantity:	96