


Capacitor, tantalum, 150 uF, 7343, +/-10% Tol, 16V@85C

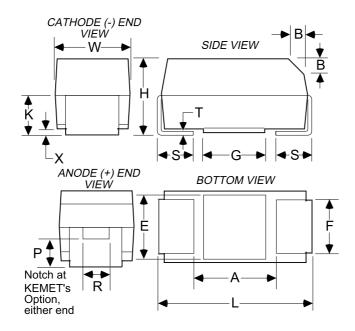

Specifications

Ripple @ 125C:

Package Kind:

Package Quantity:

0.531 A

T&R

500

Dimensions (mm)

ID Dimension Tolerance Manufacturer: KEMET L 7.3 +/-0.3 Capacitance: 150 uF w 4.3 +/-0.3 Voltage DC @ 85C: 16V н 2.8 +/-0.3 Voltage DC @ 105C: 13V Κ 1.5 +/-0.2 Voltage DC @ 125C: 10V F 2.4 +/-0.1 **Tolerance:** +/-10% s 1.3 +/-0.3 Application: Low ESR В 0.5 +/-0.15 Body Type: Molded Chip Х 0.1 **Temperature Range:** -55/+125C ref Ρ 0.9 ESR: 85 mOhm ref R 1 Footprint: 7343 ref т 0.13 Termination: Solder Plated ref 24 uA Α Leakage Current: 3.8 ref G 3.5 8% ref **Dissipation Factor:** Ε 3.5 Ripple @ 25C: 1.328 A ref Ripple @ 85C: 1.196 A Ripple @ 105C: 0.864 A



© 2006-2011 IntelliData.net

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.