


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [76090-5003](#)
Status: **Active**
Overview: [SFP+ Stacked Multi-Port Connectors](#)
Description: Small Form-factor Pluggable Plus (SFP+) Stacked 2-by-1 Multi-Port Press Fit Connector with Outer 2 Lightpipe Ports, Elastomeric Gasket, 40 Circuits, Tin (Sn) Tails

Documents:

3D Model	Application Specification AS-76090-001 (PDF)
Drawing (PDF)	Packaging Specification PK-75462-001 (PDF)
Product Specification PS-75310-001 (PDF)	Test Summary TS-76092-999 (PDF)
Application Specification AS-75310-001 (PDF)	RoHS Certificate of Compliance (PDF)

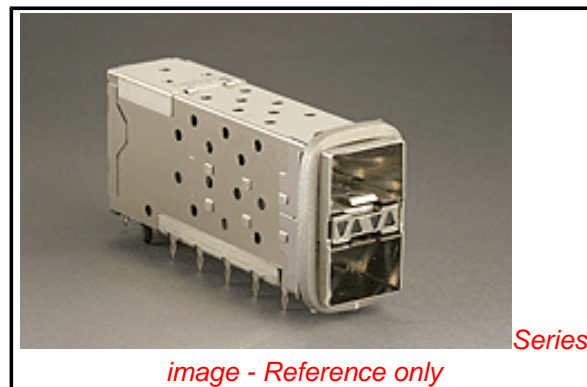

Agency Certification

CSA	LR19980
UL	E29179

General

Product Family	I/O Connectors
Series	76090
Application	Module-to-Board
Component Type	Receptacle
Overview	SFP+ Stacked Multi-Port Connectors
Product Name	SFP Plus
Type	N/A
UPC	883906028534

Physical

Boot Color	N/A
Circuits (Loaded)	40
Circuits (maximum)	40
Circuits Detail	40
Durability (mating cycles max)	100
Flammability	94V-0
Gender	Female
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Plating Mating	Gold
Net Weight	28.350/g
Number of Rows	2
Orientation	Right Angle
PC Tail Length	2.07mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.57mm
Packaging Type	Tray
Panel Mount	No
Pitch - Mating Interface	0.80mm
Pitch - Termination Interface	0.80mm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Ports	2
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40°C to +85°C
Termination Interface: Style	Through Hole - Compliant Pin
Waterproof / Dustproof	No

EU RoHS

ELV and RoHS Compliant
REACH SVHC
 Not Reviewed
Low-Halogen Status
Low-Halogen

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[76090Series](#)

Use With

[759510999 SFP Dust Plug](#)

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
Extraction Tool, 2 x 1	0622029930
Medium	
Insertion Tool	0622030140

Electrical

Current - Maximum per Contact	0.5A
Grounding to Panel	None
Shield Type	EMI Gasket, Full Shield
Shielded	Yes
Voltage - Maximum	120V AC (RMS)/DC

Material Info**Reference - Drawing Numbers**

Application Specification	AS-75310-001, AS-76090-001
Packaging Specification	PK-75462-001
Product Specification	PS-75310-001
Sales Drawing	RSD-76090-0001, SD-76090-001
Test Summary	TS-76092-999

This document was generated on 01/22/2013

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION