

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [94536-0100](#)
Status: **Active**
Description: Quick Disconnect, Flag Terminal for (1.50-0.50mm²) 16-24 AWG Wire, Accepts 4.75 x 0.81mm Tab

Documents:

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

General

Product Family	Quick Disconnects
Series	94536
Crimp Quality Equipment	Yes
Product Name	N/A
Type	Quick Disconnect
UPC	800753865310

Physical

Barrel Type	Open
Gender	Female
Glow-Wire Compliant	No
Insulation	None
Lock to Mating Part	No
Material - Metal	Brass
Material - Plating Mating	Unplated
Material - Plating Termination	Tin
Net Weight	0.480/g
Orientation	Flag
Packaging Type	Reel
Polarized to Mating Part	Yes
Tab Thickness	0.81mm
Tab Width	5.60mm
Temperature Range - Operating	N/A
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	2.00mm max.
Wire Size AWG	16, 18, 20, 22, 24
Wire Size mm ²	0.50 - 1.50

Electrical

Voltage - Maximum	250V
-------------------	------

Material Info

Reference - Drawing Numbers

Sales Drawing	SD-94536-002
---------------	--------------

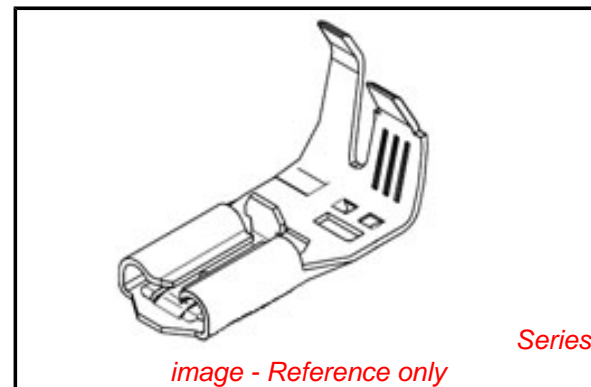


image - Reference only

EU RoHS

**ELV and RoHS
Compliant**

REACH SVHC

Not Reviewed

Low-Halogen Status

Not Reviewed

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[94536Series](#)

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
Mini-Mac™	0638017400
Applicator Rear Feed	
Hand Crimp Tool for Quick Disconnect Flag Female Terminals	0638197800
Hand Crimp Tool for Quick Disconnect Flag Female Terminals	0638199700

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION