MATERIAL NUMBER LOOSE PCS	ENGINEERING NUMBER LOOSE PCS	MATERIAL NUMBER ON STRIP	ENGINEERING NUMBER ON STRIP	MATERIAL NUMBER ON TAPE	ENGINEERING NUMBER ON TAPE	"C" MAX	2 "D" MWID	"E" MIN	"F" REF	"H" REF
190020044	C-5265	190020046	C-5265Z	190020045	C-5265T	.31/7.9	.245/6.22	.144/3.66	.19/4.8	1.561/39.65
196060005	19606-0005	196060004	19606-0004	196060006	19606-0006	.30/7.6	.230/5.84	.120/3.05	.15/3.8	1.513/38.43

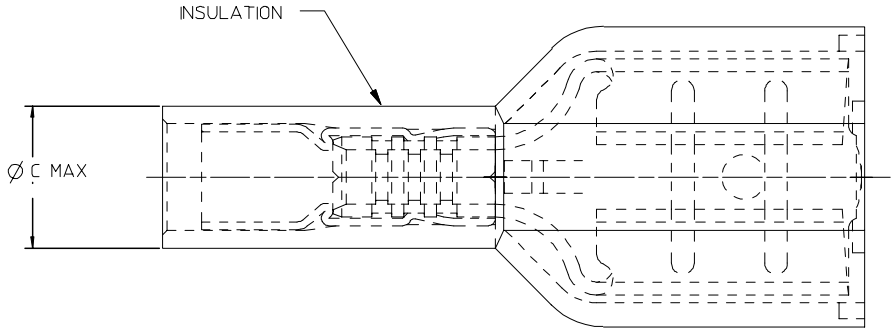

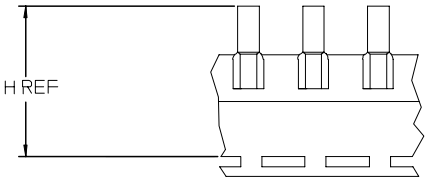

PARTS ON TAPE

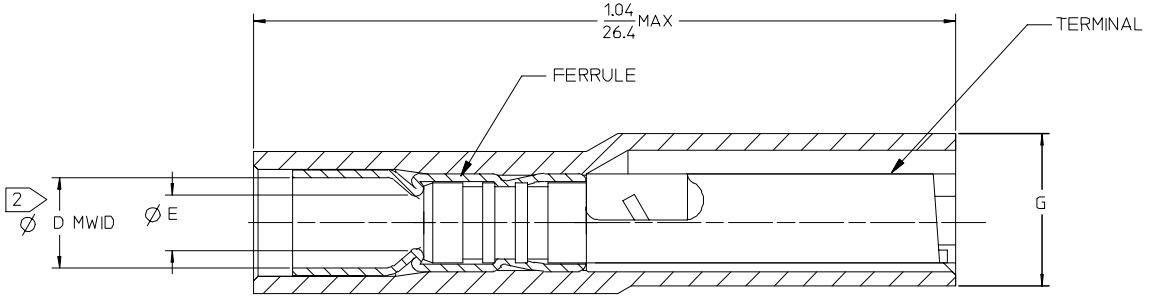

TERMINAL IS NOT SECTIONED FOR CLARITY

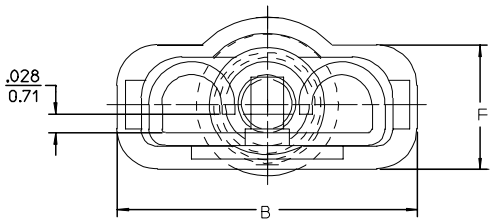

SALES DRAWING

NOTES:

1. MATERIAL: TERMINAL BRASS .018/0.46 THK REF.
   TERMINAL PLATING: ELECTRO TIN
   FERRULE: BRASS
   FERRULE PLATING: ELECTRO TIN
   INSULATION: NYLON 94V2 COLOR YELLOW.

2. MWID = MAXIMUM WIRE INSULATION DIAMETER

3. PART IS RoHS COMPLIANT (D)

ADD NOTE 3
EC NO: ETC2007-0243 2006/12/14
DRWN: JLOMASTRO 2006/12/15
CHKD: JMACNEIL 2006/12/15
APPR: JMACNEIL 2006/12/15
DESCRIPTION
REV: D

QUALITY SYMBOLS
▼=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .005
2 PLACES	± 0.13	± .01
1 PLACE	± 0.25	± ---
ANGULAR ±1/2°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: IN/MM
SCALE: 4:1
DESIGN UNITS: INCH
THIRD ANGLE PROJECTION

DRAWN BY	BENDERLE	DATE 2005/04/15
CHECKED BY	R DEROSS	DATE 2005/04/15
APPROVED BY	R DEROSS	DATE 2005/04/15

TITLE: AVIKRIMP FEMALE FIQD 12-10 AWG

MOLEX INCORPORATED

MATERIAL NO.: SEE CHART
DOCUMENT NO.: SD-19002-005
SHEET NO.: 1 OF 1
SIZE: C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION