

Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 743226

FEATURES AND SPECIFICATIONS

Features and Benefits

- Positive lock
- Fully isolated terminals
- Polarized housing assures proper mating
- Male and female terminals may be used in plug housing

Reference Information

Packaging: Bag
 UL File No.: E29179
 CSA File No.: LR19980
 TUV License No.: R75107
 Mates With: [3191](#) receptacle
 Use With: Standard .093" terminal
 Designed In: Inches

Electrical

Voltage: 600V
 Current: 12.0A max.*
 Dielectric Withstanding Voltage: 5000V AC rms

Mechanical

Contact Retention to Housing: 20 lb min.


Physical

Housing: Nylon, UL 94V-0 or 94V-2
 Operating Temperature: -40 to +105°C


* Depending on circuit size and wire gauge; please refer to product specifications

**molex® 6.71 mm (.264") Pitch
 .093" Pin and Socket
 Plug**

3191

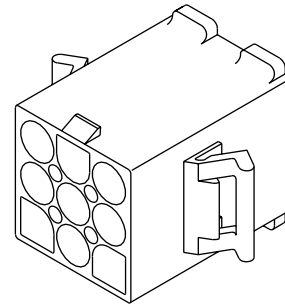

CATALOG DRAWING (FOR REFERENCE ONLY)

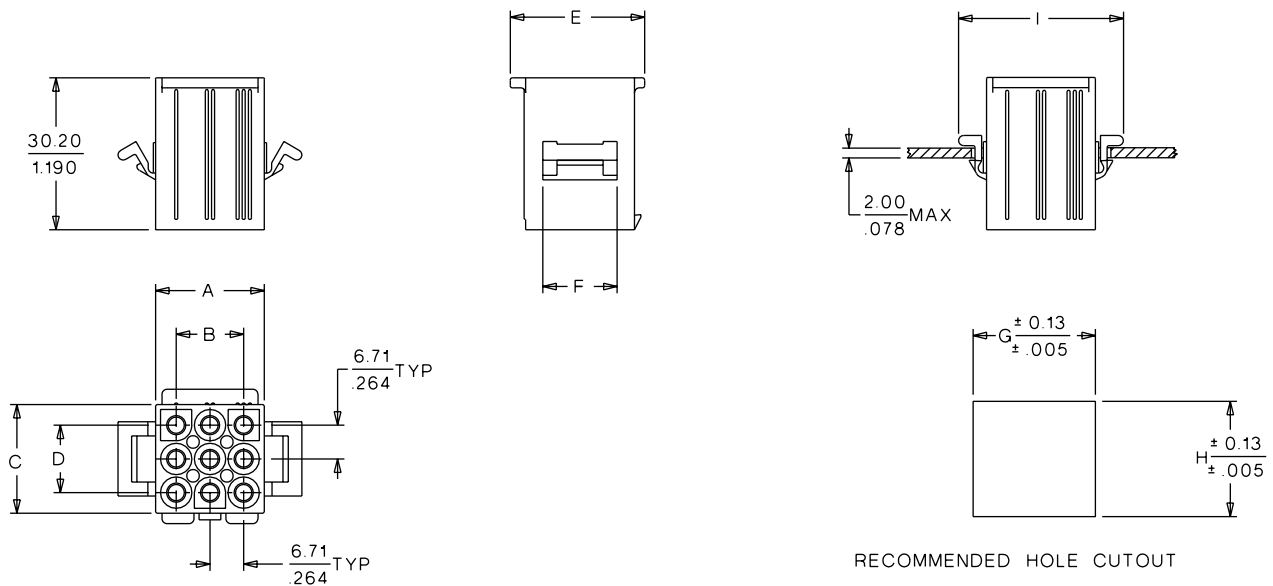

RECOMMENDED HOLE CUTOUT

ORDERING INFORMATION AND DIMENSIONS

Circuits	Order No.				Amperes Per Circuit	Dimension							
	Panel Mount		Free Hanging			A	B	C	D	E	F	G	H
	94V-2	94V-0	94V-2	94V-0									
1	• 19-09-2018	• 19-09-2017	• 19-09-2019	• 19-09-2016	12	8.10 (.320)				11.15 (.439)	6.35 (.250)	12.30 (.484)	10.00 (.394)
2	• 19-09-2028	• 19-09-2027	• 19-09-2029	• 19-09-2026	12	14.90 (.590)	6.71 (.264)	8.10 (.320)		13.30 (.520)	8.20 (.320)	20.32 (.800)	9.27 (.365)
3	• 19-09-2038	• 19-09-2037	• 19-09-2039	• 19-09-2036	11	21.59 (.850)	13.42 (.528)	8.20 (.320)		13.30 (.520)	8.20 (.320)	25.90 (1.020)	10.00 (.394)
4	• 19-09-2048	• 19-09-2047	• 19-09-2049	• 19-09-2046	9	28.30 (1.110)	20.13 (.792)	8.20 (.320)		13.30 (.520)	8.20 (.320)	32.26 (1.270)	10.00 (.394)
6	• 19-09-2068	• 19-09-2067	• 19-09-2069	• 19-09-2066	9	21.60 (.850)	13.42 (.528)	14.90 (.590)	6.71 (.264)	19.96 (.790)	14.70 (.580)	26.60 (1.047)	17.30 (.681)
9	• 19-09-2098	• 19-09-2097	• 19-09-2099	• 19-09-2096	9	21.60 (.850)	13.42 (.528)	21.60 (.850)	13.42 (.528)	26.70 (1.050)	14.70 (.580)	26.62 (1.048)	23.09 (.909)
12	• 19-09-2128	• 19-09-2127	• 19-09-2129	• 19-09-2126	9	28.20 (1.110)	20.13 (.792)	22.10 (.870)	13.42 (.528)	26.70 (1.050)	14.70 (.580)	33.02 (1.300)	23.10 (.910)
15	• 19-09-2158	• 19-09-2157	• 19-09-2159	• 19-09-2156	9	35.10 (1.380)	26.84 (1.056)	22.10 (.870)	13.42 (.528)	26.70 (1.050)	14.70 (.580)	39.42 (1.552)	23.11 (.910)

• US Standard Product, available through Molex franchised distributors



PRODUCT SPECIFICATION

.093 SERIES HIGH CURRENT END-CARRIED TERMINALS

1.0 SCOPE

This Product Specification covers the .093 Series 6.71 mm (.264 inch) centerline (pitch) 3191 Series and the 5.03 mm (.198 inch) centerline Standard .093 Series connectors using.

2.0 PRODUCT DESCRIPTION

2.1 PRODUCT SERIES NUMBER AND DESCRIPTION

42477 / 42478 - .093 SERIES HIGH CURRENT, END-CARRIED CRIMP TERMINALS

3191 - .093 SERIES TYPE PLUG AND RECEPTACLE HOUSINGS

1261,1292, 1360.1375, 1396, 1490, 1545, 1619, 1951, 2163, 2629 - STANDARD .093 SERIES PLUG AND RECEPTACLE HOUSINGS

2.2 DIMENSIONS, MATERIALS, PLATINGS AND MARKINGS

See the appropriate sales drawings of above series numbers for further information on dimensions, materials, platings and markings.

2.3 SAFETY AGENCY APPROVALS

UL File #E29179
CSA File #LR19980
TUV License #R75107

3.0 APPLICABLE DOCUMENTS AND SPECIFICATIONS

MIL-STD-1344A
UL 1682

4.0 RATINGS

4.1 VOLTAGE

600 Volts AC (RMS) for 3191 Series
250 Volts AC (RMS) for Standard .093 Series

4.2 CURRENT AND APPLICABLE WIRES

AWG	Amps	Outside Insulation Diameter
14	17	3.56 mm (.140 inch)
18	12	2.79 mm (.110 inch)

4.3 TEMPERATURE

Operating: - 55°C to + 105°C

<u>REVISION:</u> B	<u>ECR/ECN INFORMATION:</u> EC No: UCR2002-0301 DATE: 09 / 26 / 01	<u>TITLE:</u> PRODUCT SPECIFICATION .093 DIA. HIGH CURRENT TERMINALS IN 3191 & STD. .093 SERIES HSGS.	<u>SHEET No.</u> 1 of 4
<u>DOCUMENT NUMBER:</u> PS-42477	<u>CREATED / REVISED BY:</u> BWIRKUS 9/26/01	<u>CHECKED BY:</u> BWIRKUS 9/26/01	<u>APPROVED BY:</u> SFRY 10/5/01



PRODUCT SPECIFICATION

5.0 PERFORMANCE

5.1 ELECTRICAL REQUIREMENTS

ITEM	DESCRIPTION	TEST CONDITION	REQUIREMENT
1	Contact Resistance (Low Level)	Mate connectors: apply a maximum voltage of 20 mV and a current of 20 mA. (Measurement locations in Section 7.0)	10 milliohms MAXIMUM [initial]
2	Contact Resistance of Wire Termination (Low Level)	Terminate the applicable wire to the terminal and measure wire using a voltage of 20 mV and a current of 100 mA. (Measurement locations in Section 7.0)	2 milliohms MAXIMUM [initial]
3	Dielectric Withstanding Voltage	Mate connectors: apply a voltage of 5000 VAC for the 3191 Series, 2000 VAC for the .093 Series for 1 minute between adjacent terminals and between terminals to ground.	No breakdown; current leakage < 5 mA
4	Temperature Rise (via Current Cycling)	Mate connectors: measure the temperature rise at the rated current, subjecting the connector to : 96 hours of continuous current, followed by 240 hours of current cycling (45 minutes ON and 15 minutes OFF per hour).	Temperature rise: +30°C MAXIMUM

5.2 MECHANICAL REQUIREMENTS

ITEM	DESCRIPTION	TEST CONDITION	REQUIREMENT
5	Terminal Insertion Force	Insert terminal into housing until fully locked at a rate of 25 ± 6 mm (1 ± ¼ inch) per minute.	22.2 N (5 lbf) MAXIMUM insertion force
6	Connector Mate and Unmate Forces	Mate and unmate connector (male to female) at a rate of 25 ± 6 mm (1 ± ¼ inch) per minute.	15.6 N (3.5 lbf) MAXIMUM insertion force 6.7 N (1.5 lbf) MINIMUM [initial] withdrawal force
7	Terminal Retention Force (in Housing)	Axial pullout force on the terminal in the housing at a rate of 25 ± 6 mm (1 ± ¼ inch) per minute.	89.0 N (20 lbf) MINIMUM retention force
8	Durability	Mate connectors up to {25 cycles for tin (non-noble) plating OR 250 cycles for gold (noble) plating} at a maximum rate of 5 cycles per minute prior to Environmental Tests.	10 milliohms MAXIMUM (change from initial)
9	Vibration (Random)	Subject mated connectors to vibration with an amplitude of 1.52 mm (.060 inch) peak to peak; a sweep of 10-55-10 hertz in 1.0 min.; and a duration of 2.0 hours in the ±X,±Y,±Z axes.	10 milliohms MAXIMUM (change from initial) & Discontinuity < 1 microsecond

REVISION: B	ECR/ECN INFORMATION: EC No: UCR2002-0301 DATE: 09 / 26 / 01	TITLE: PRODUCT SPECIFICATION .093 DIA. HIGH CURRENT TERMINALS IN 3191 & STD. .093 SERIES HSGS.	SHEET No. 2 of 4
DOCUMENT NUMBER: PS-42477	CREATED / REVISED BY: BWIRKUS 9/26/01	CHECKED BY: BWIRKUS 9/26/01	APPROVED BY: SFRY 10/5/01



PRODUCT SPECIFICATION

5.2 MECHANICAL REQUIREMENTS (CONTINUED)

ITEM	DESCRIPTION	TEST CONDITION	REQUIREMENT
10	Shock (Mechanical)	Subject mated connectors to 3 shocks at 50 g's with ½ sine wave (11 milliseconds) shocks in the ±X,±Y,±Z axes (18 shocks total).	10 milliohms MAXIMUM (change from initial) & Discontinuity < 1 microsecond
11	Wire Pullout Force (Axial)	Apply an axial pullout force on the wire at a rate of 25 ± 6 mm (1 ± ¼ inch).	*** N (***) lbf) MINIMUM pullout force {Recommended minimum value: 75% of tensile strength of the wire}
12	Wire Pullout Force (Right Angle)	Apply a right angle pullout force on the wire at a rate of 25 ± 6 mm (1 ± ¼ inch).	MINIMUM pullout force: 18 AWG: 89 N (20 lbf) 16 AWG: 133 N (30 lbf) 14 AWG: 267 N (60 lbf) {Recommended minimum value: 75% of tensile strength of the wire}
13	Terminal Insertion Force (into Housing)	Apply an axial insertion force on the terminal at a rate of 25 ± 6 mm (1 ± ¼ inch).	22 N (5 lbf) MAXIMUM insertion force

5.3 ENVIRONMENTAL REQUIREMENTS

ITEM	DESCRIPTION	TEST CONDITION	REQUIREMENT										
14	Shock (Thermal)	Mate connectors; expose to 10 cycles of: <table border="1"> <thead> <tr> <th>Temperature °C</th> <th>Duration (Minutes)</th> </tr> </thead> <tbody> <tr> <td>-40 +0/-3</td> <td>30</td> </tr> <tr> <td>+25 ±10</td> <td>5 MAXIMUM</td> </tr> <tr> <td>+105 +3/-0</td> <td>30</td> </tr> <tr> <td>+25 ±10</td> <td>5 MAXIMUM</td> </tr> </tbody> </table>	Temperature °C	Duration (Minutes)	-40 +0/-3	30	+25 ±10	5 MAXIMUM	+105 +3/-0	30	+25 ±10	5 MAXIMUM	10 milliohms MAXIMUM (change from initial) & Visual: No Damage
Temperature °C	Duration (Minutes)												
-40 +0/-3	30												
+25 ±10	5 MAXIMUM												
+105 +3/-0	30												
+25 ±10	5 MAXIMUM												
15	Humidity (Cyclic)	Expose mated connectors to a temperature cycles of 25 ± 3°C at 95 ± 5% relative humidity and 65 ± 3°C at 50 ± 5% relative humidity; dwell time of 1.0 hour; ramp time of 0.5 hours for 240 hours.	10 milliohms MAXIMUM (change from initial) & Dielectric Withstanding Voltage: No Breakdown at 500 VAC & Insulation Resistance: 1000 Megohms MINIMUM & Visual: No Damage										
16	Salt Spray	Mate connectors: Duration: 96 hours exposure; Atmosphere: salt spray from a 5% solution; Temperature: 35 +1/-2°C	10 milliohms MAXIMUM (change from initial) & Visual: No Damage										

REVISION: B	ECR/ECN INFORMATION: EC No: UCR2002-0301 DATE: 09 / 26 / 01	TITLE: PRODUCT SPECIFICATION .093 DIA. HIGH CURRENT TERMINALS IN 3191 & STD. .093 SERIES HSGS.	SHEET No. 3 of 4
DOCUMENT NUMBER: PS-42477	CREATED / REVISED BY: BWIRKUS 9/26/01	CHECKED BY: BWIRKUS 9/26/01	APPROVED BY: SFRY 10/5/01



PRODUCT SPECIFICATION






5.3 ENVIRONMENTAL REQUIREMENTS (continued)

ITEM	DESCRIPTION	TEST CONDITION	REQUIREMENT
17	Thermal Aging	Mate connectors; expose to: 240 hours at 105 ± 2°C	10 milliohms MAXIMUM (change from initial]) & Visual: No Damage
18	Humidity (Steady State)	Mate connectors: expose to a temperature of 40 ± 2°C with a relative humidity of 90-95% for 240 hours.	10 milliohms MAXIMUM (change from initial) & Dielectric Withstanding Voltage: No Breakdown at 500 VAC & Insulation Resistance: 1000 Megohms MINIMUM & Visual: No Damage

6.0 PACKAGING

Parts shall be packaged to protect against damage during handling, transit and storage.

REVISION: B	ECR/ECN INFORMATION: EC No: UCR2002-0301 DATE: 09 / 26 / 01	TITLE: PRODUCT SPECIFICATION .093 DIA. HIGH CURRENT TERMINALS IN 3191 & STD. .093 SERIES HSGS.	SHEET No. 4 of 4
DOCUMENT NUMBER: PS-42477	CREATED / REVISED BY: BWIRKUS 9/26/01	CHECKED BY: BWIRKUS 9/26/01	APPROVED BY: SFRY 10/5/01

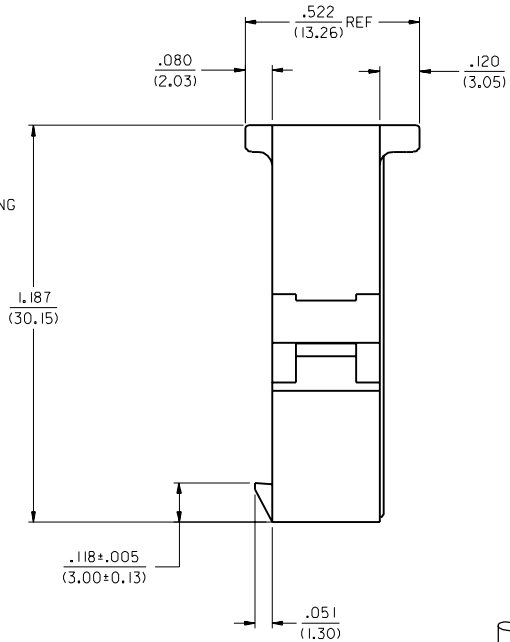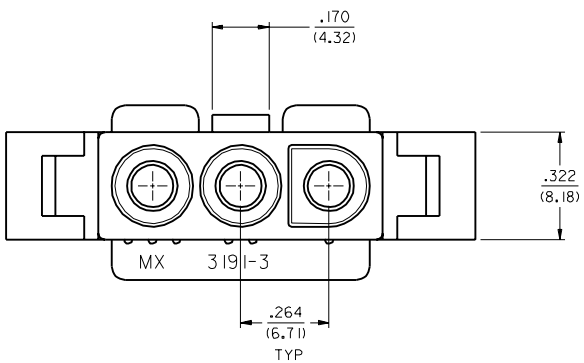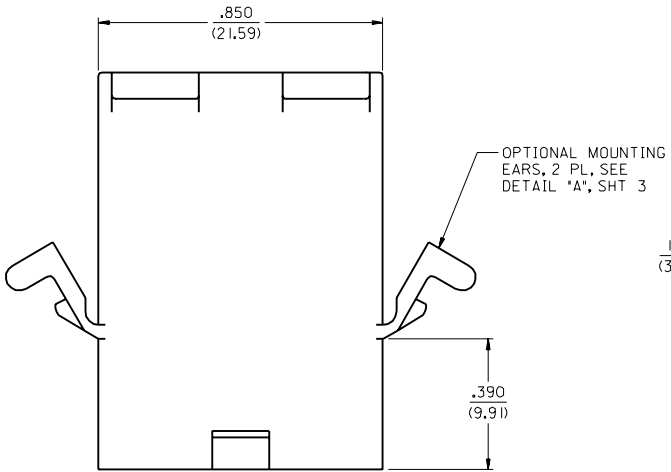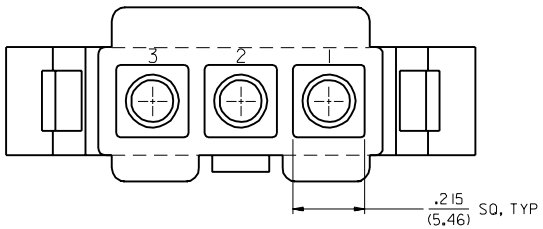

PLUG

3	J5			
2	J5	J5	REDRAWN ON CAD	
1	J5		ECR U6 0734	RW
			CK 1/8/96	

MMB, SH, REV, LTR, REVISIONS

DIMENSIONS SHOWN METRIC (INCH) UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 1/2°

INCH	METRIC
3 PLACE ± .010	---
2 PLACE ± .015	± 0.25
1 PLACE ---	± 0.38

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

FILE NAME: SD-3191-3
 DRAWING NO.: 60532
 SHEET NO.: 1 of 3
 DATE: 1/ 8/96

MOLEX INCORPORATED
 LISLE, ILL. U.S.A.

SEE CHART

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

13 12 11 10 9 8 7 6 3191 4 3 2 1

PLUG		RECEPTACLE	
PART NO.	ENG. NO.	PART NO.	ENG. NO.
19-09-2038	3191-3P	19-09-1039	3191-3R1
19-09-2039	3191-3P1	19-09-1036	3191-3R1-201
19-09-2037	3191-3P-201	19-09-3030	3191-3R1RD
19-09-2036	3191-3P1-201		
19-09-1038	3191-3P1RD		
19-09-3032	3191-3PRD		
19-09-3033	3191-3PBU		

LEGEND

3191-3*****





CIRCUIT SIZE

P = PLUG
R = RECEPTACLE

EARS: BLANK = WITH PREBENT EARS (PLUG ONLY)
I = WITHOUT EARS

COLOR: BLANK = NATURAL COLOR
AM=AMBER BK=BLACK BU=BLUE
BN=BROWN GY=GRAY GN=GREEN
OR=ORANGE RD=RED YW=YELLOW
COLORS AVAILABLE ONLY IN 94V-2 MATERIAL

MATERIAL: BLANK=NYLON TYPE 6/6,94V-2
201=NYLON TYPE 6/6, 94V-0

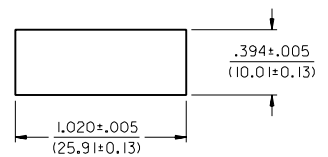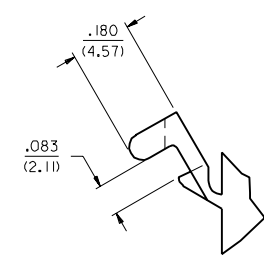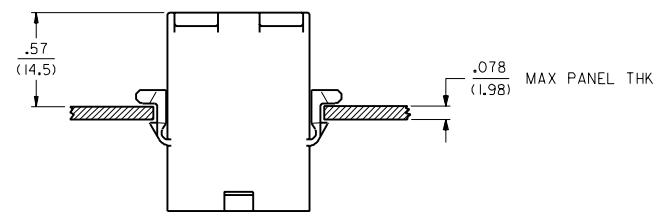

RECOMMENDED HOLE CUTOUT

DETAIL "A"
PREBENT MOUNTING EAR
(SCALE 4:1)

DIMENSIONS SHOWN (METRIC) INCH		▽=0 ▼=0		REVISE ONLY ON CAD SYSTEM	
UNLESS OTHERWISE SPECIFIED TOLERANCES ANGULAR ± 1/2°					
INCH		METRIC			
3 PLACE	± .010	---			
2 PLACE	± .015	± 0.25			
1 PLACE	---	± 0.38			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS					
J5		SEE SHEET 1			
DRWG. BY	CAC	CHK'D. BY	RW		
APP'D. BY	RAS	SCALE	--:--		

TITLE: .093/(2.36) HOUSINGS PLUG AND RECEPTACLE
3 CKT. ±.264/(6.71) CTRS.

MOLEX INCORPORATED
LITTLE ROCK, ARK. 60532 U.S.A.

PART NO. SD-3191-3*
SHEET NO. 3
DATE 1/8/96

SEE CHART

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

13 12 11 10 9 8 7 6 5 4 3 2 NO P.S. 1