

Type BLR-1110 Fuse Block 10 Pole – Regular Auto Blade




www.optifuse.com (619) 593-5050

Specifications:

Max Voltage: 32VDC
Max Current Rating: 20A per Circuit
Fuse Type: Regular Auto Blade
 – APR, ANR Series
Housing and Base: PBT, Black
Cover: PC, Clear
Cover Inner Seal: Silicone
Bottom Rubber Seal: EPDM, Black
IP Rating: 56
Wires: 10, #12 AWG UL1015,
 (6.5", 165mm)

OptiFuse Part Number	Description	# per circuit	Circuits	Total
BLR-1110-12AWG	Wires- 12 AWG	2	10	20
BLR-1110-GROMM	Rubber grommet	2	10	20
BLR-1110-CON	Connector	2	10	20
BLR-1110-INSERT	Insert for wires and fuses	1	10	10
BLR-1110-BLOCK	Fuse block, cover & inserts, w/o above wires, connectors, grommets	-	-	1
BLR-1110	Full fuse block	-	-	1

Mechanical Dimensions: Inches [mm]

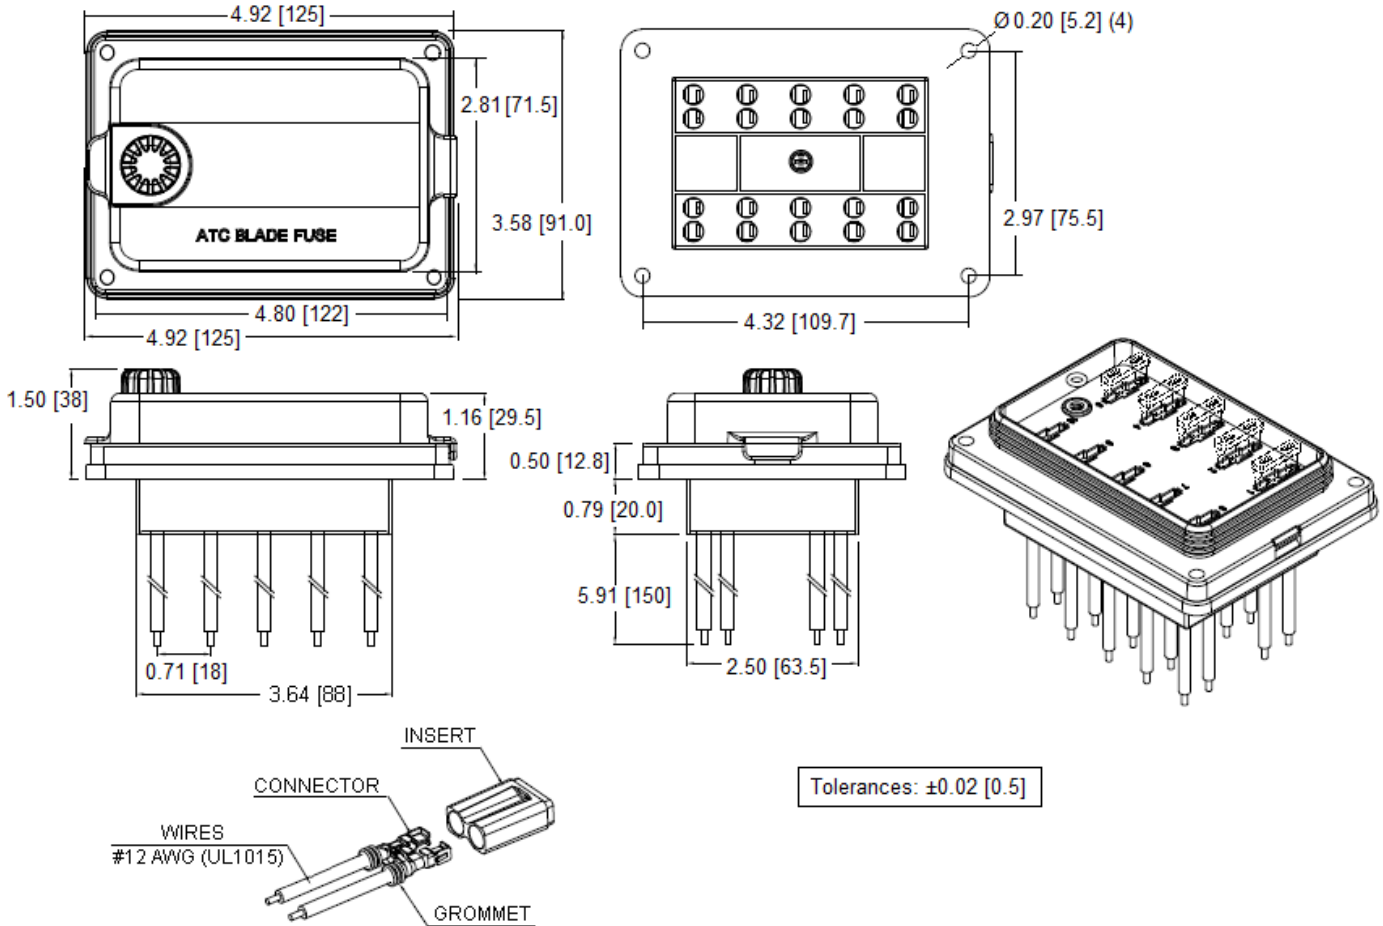

	Warning: -Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
	-Avoid contact of device with chemical solvent. Prolonged contact may damage the device performance.

Note: All specifications subject to change without notice.

Rev A 10/2018 - Page: 1/1
Code S02-01H