


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

**NOTES:**

1. SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AND TO INDICATE PACKAGE QUANTITY.
2. PATCH CORDS CAN BE USED WITH GIGA-PUNCH FOUR-PAIR CONNECTING BLOCKS.
3. THE GIGA-PUNCH PATCH CORD IS POLARIZED TO PREVENT REVERSE INSTALLATION TO THE CONNECTOR BLOCK, INCORPORATES A CABLE JACKET RETENTION FEATURE WHICH MINIMIZES WIRE UNTWISTING, AND HAS AN INTEGRAL STRAIN RELIEF.
4. PATCH CORDS CONSTRUCTED USING UL OR ETL VERIFIED CABLE.
5. MATERIAL: CONNECTOR: POLYCARBONATE  
CABLE: CAT6, 24 AWG STRANDED-TIN/COPPER  
JACKET: PVC  
JACKET COLOR: WHITE

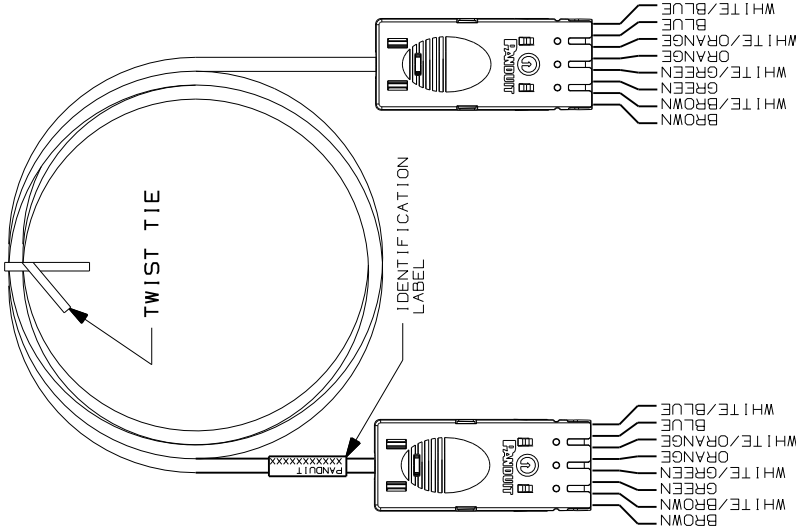

PANDUIT P/N	LENGTH (MIN) FEET (mm)	WEIGHT LB/10 PCS (530 g/10 PCS)
GPPC41G3Y	3 FT. (914mm)	1.17 LB/10 PCS (530 g/10 PCS)
GPPC41G5Y	5 FT. (1524mm)	1.70 LB/10 PCS (772 g/10 PCS)
GPPC41G7Y	7 FT. (2134mm)	2.17 LB/10 PCS (984 g/10 PCS)
GPPC41G9Y	9 FT. (2743mm)	2.70 LB/10 PCS (1226 g/10 PCS)
GPPC41G14Y	14 FT. (4267mm)	4.03 LB/10 PCS (1827 g/10 PCS)
GPPC41G20Y	20 FT. (6096mm)	5.82 LB/10 PCS (2590 g/10 PCS)
GPPC41G1M	1 METER	.97 LB/10 PCS (439 g/10 PCS)
GPPC41G2M	2 METERS	1.77 LB/10 PCS (797 g/10 PCS)
GPPC41G3M	3 METERS	2.48 LB/10 PCS (1119 g/10 PCS)
GPPC41G5M	5 METERS	3.93 LB/10 PCS (1783 g/10 PCS)

CAD FILENAME/LAYERS M02479NIT\_DC358\_00A.PRT

**PANDUIT** CORP. TINLEY PARK, ILLINOIS  
GIGA-PUNCH(TM) PATCH CORDS  
(GPPC41G\*\*Y) CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:  
(.XX) ± .031(.8) ANGLES ±  
(.XXX) ± .010(.3)  
UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY: NER	MAT'L:	SCALE: NONE
DATE: 3-21-06	SEE NOTES	DWG NO. 02479-358
CHK'D:		SIZE: A
REV: R	DATE: 3-21-06	NER
DESCRIPTION: RELEASED FOR PRODUCTION	ECN: 02479-358	CHK
BY: NER	DESCRIPTION: PATCH CORDS	BY: NER
DATE: 3-21-06	DESCRIPTION: CUSTOMER DRAWING	DATE: 3-21-06
CHK: NER	DESCRIPTION: GIGA-PUNCH(TM) PATCH CORDS	CHK: NER
DESCRIPTION: (GPPC41G**Y) CUSTOMER DRAWING		DESCRIPTION: (GPPC41G**Y) CUSTOMER DRAWING