




Dimensions

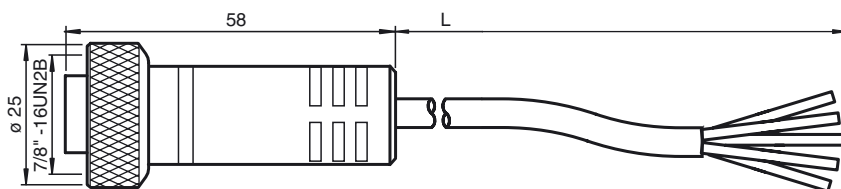

Model Number

V95-G-YE4M-STOOW

Female connector, 7/8" - 16 UNF, 5-pin, PUR cable

Features

- Thread 7/8"

Technical data

General specifications

Number of pins	5
Connection 1	female connector
Construction type 1	straight
Threading 1	7/8"
Connection 2	cable end

Electrical specifications

Operating voltage	U _B	max. 600 V
Test voltage		1500 V
Operating current		8 A
Volume resistance		< 5 mΩ


Ambient conditions

Ambient temperature	-30 ... 105 °C (-22 ... 221 °F)
---------------------	---------------------------------

Mechanical specifications

Protection degree	IP67	
Material		
Contacts	gold plated copper alloy	
Cable	PVC	
Core insulation	PVC	
Cable	fine-strand, flexible	
Sheath diameter	Ø 12.9 mm	
Bending radius	10 x cable diameter	
Color	yellow	
Cores	5 x 1.5 mm ² (16 AWG)	
Length	L	4 m
Note	STOOW UL Standard	

Electrical connection

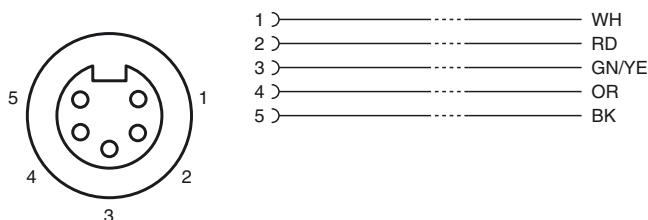

Release date: 2011-01-13 22:41 Date of issue: 2011-01-13 912592_ENG.xml

Subject to modifications without notice

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776-4411
fa-info@pepperl-fuchs.com

Copyright Pepperl+Fuchs
Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com