

C3225X5R1C226M250AA

TDK Item Description : C3225X5R1C226MT****



Application & Main Feature

Commercial Grade (General (Up to 50V))

Series

C3225 [EIA CC1210]



Dimensions

L 3.20mm +/-0.4mm
 W 2.50mm +/-0.3mm
 T 2.50mm +/-0.3mm
 B 0.20mm Min.
 G

Temperature Characteristic

X5R (-55 to 85 degC +/-15%)

Rated Voltage

1C (16Vdc)

Capacitance

22uF

Capacitance Tolerance

M (+/-20%)

Dissipation Factor

5% Max.


Insulation Resistance

4Mohm Min.


AEC-Q200

Not Applicable


DC Bias Characteristic

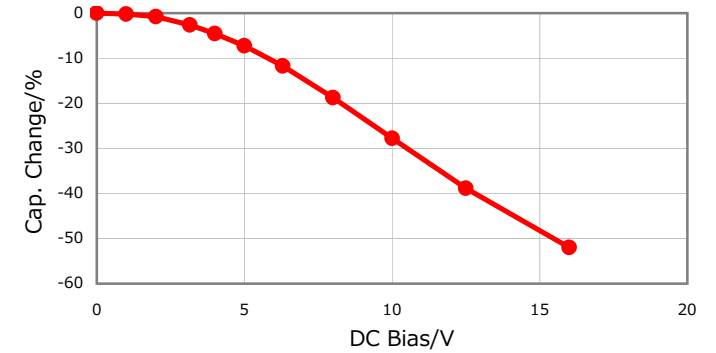


|Z|, ESR vs. Freq. Characteristics

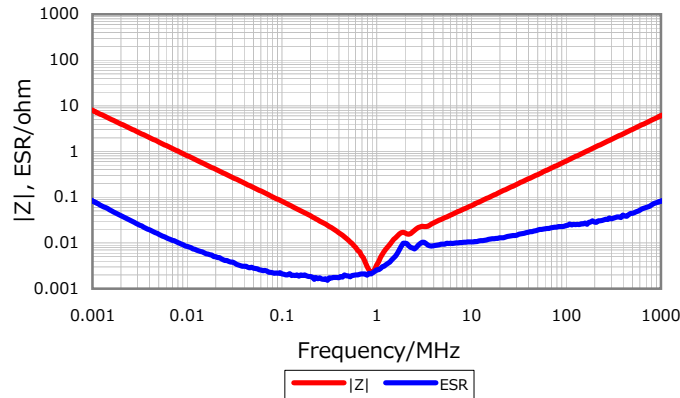


Temperature Characteristic

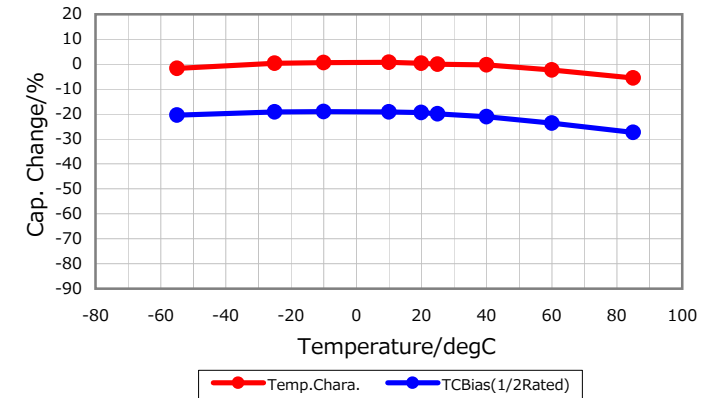

Cap. vs. Freq. Characteristic

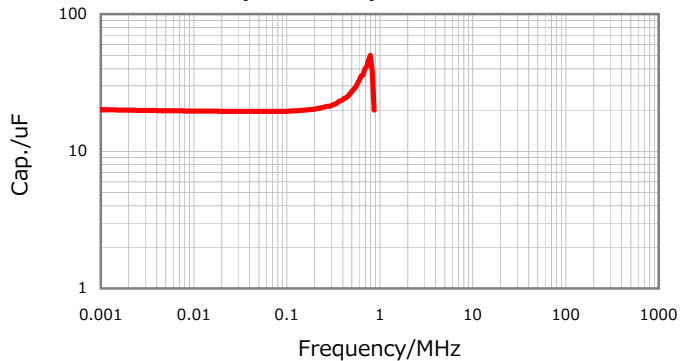

Ripple Temperature Rise Characteristic

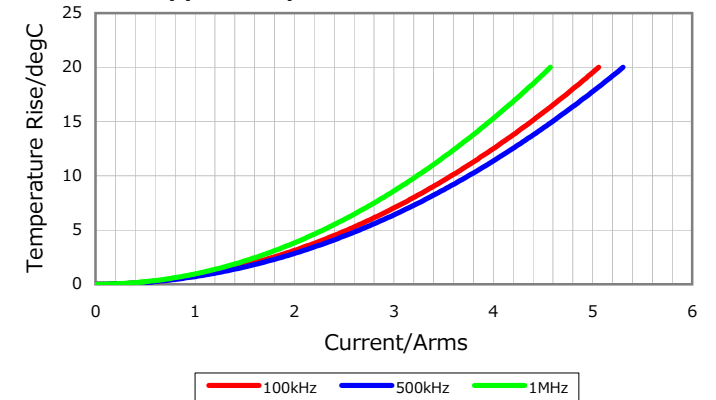

Characterization Sheet (Multilayer Ceramic Chip Capacitors)



All specifications are subject to change without notice.

September 28, 2013