



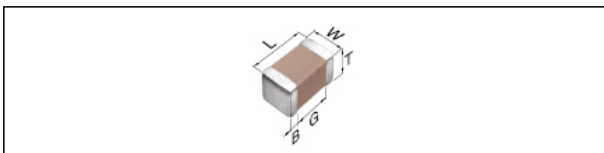


C4532X7R2A105M230KA

Applications	 Commercial Grade
	 Please refer to Part No. CGA8N2X7R2A105M230KA for automotive use.
Feature	 Mid Voltage (100 to 630V)
Series	C4532 [EIA CC1812]



Size	
Length(L)	4.50mm +/-0.40mm
Width(W)	3.20mm +/-0.40mm
Thickness(T)	2.30mm +/-0.20mm
Terminal Width(B)	0.20mm Min.
Terminal Spacing(G)	

Electrical Characteristics	
Capacitance	1uF +/-20%
Rated Voltage	100Vdc
Temperature Characteristic	X7R(+/-15%)
Dissipation Factor	3% Max.
Insulation Resistance	500MΩ Min.

Other	
Soldering Method	Reflow
AEC Q200	No
Packing	Blister (Plastic)Taping [180mm Reel]
Package Quantity	500 Pcs Min.


•This PDF document was created based on the data listed on the TDK Corporation website.
 •All specifications are subject to change without notice.

C4532X7R2A105M230KA


Characteristic Graphs



C4532X7R2A105M230KA

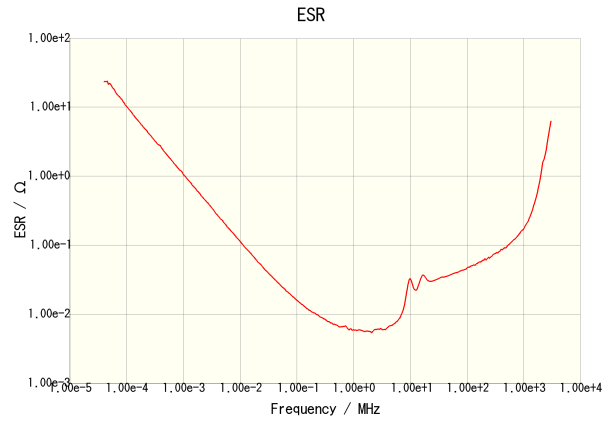


C4532X7R2A105M230KA

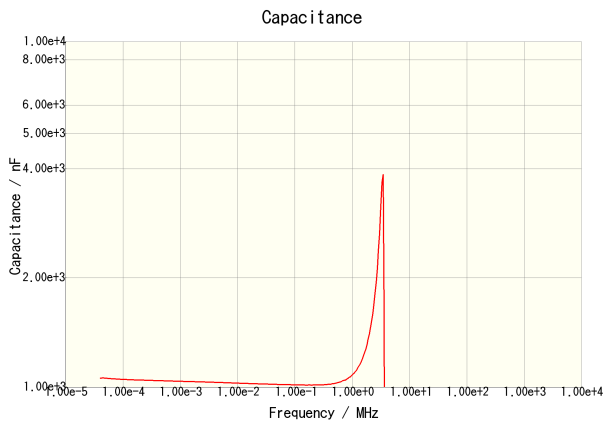


C4532X7R2A105M230KA



C4532X7R2A105M230KA

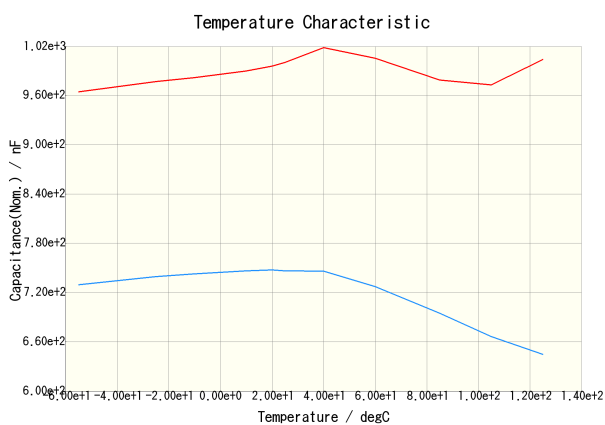

C4532X7R2A105M230KA(DC Bias = 0V) C4532X7R2A105M230KA(DC Bias = 50V)

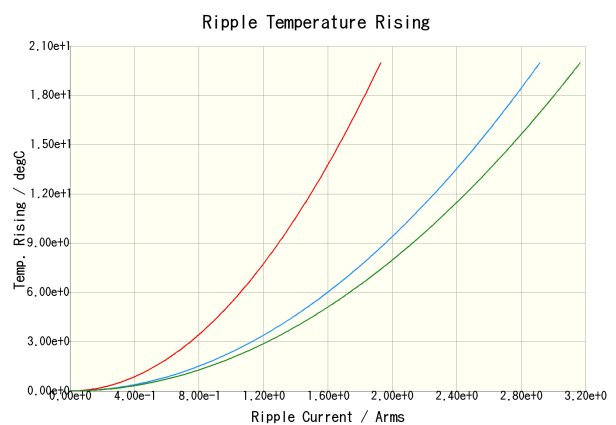

C4532X7R2A105M230KA(100kHz) C4532X7R2A105M230KA(500kHz)
C4532X7R2A105M230KA(1MHz)

•This PDF document was created based on the data listed on the TDK Corporation website.
•All specifications are subject to change without notice.