
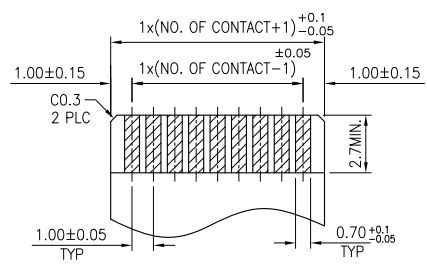

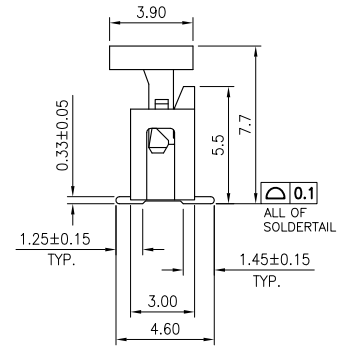
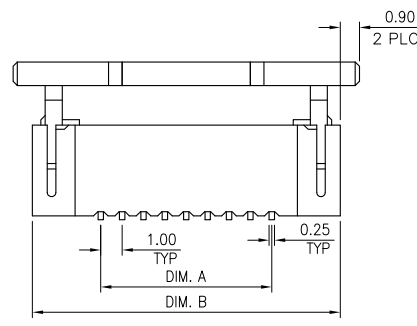
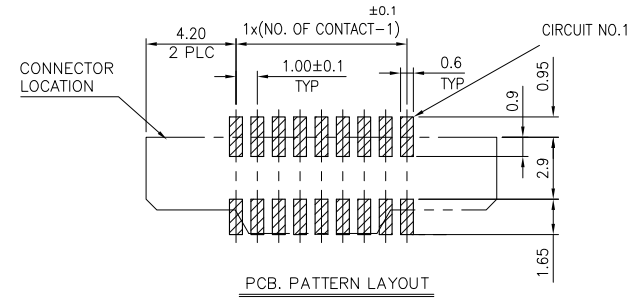
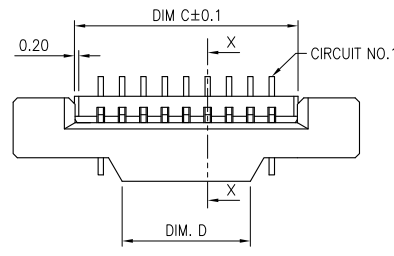


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT 2011 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DW	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD	
E		ECR-13-000474	10JAN13	AW	SC	

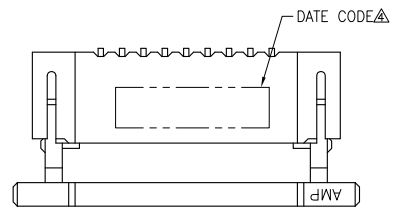

APPLICABLE FPC  
 RECOMMENDED DIMENSION  
 (THICKNESS: 0.3  $\pm 0.05$ )

- NOTES:
- MATERIAL:
    - 1.1 HOUSING: THERMOPLASTIC (PA9T) UL94 V-0, COLOR: BLACK.
    - 1.2 ACTUATOR: THERMOPLASTIC (PA9T) UL94 V-0, COLOR: BLACK.
    - 1.3 CONTACTS: PHOSPHOR BRONZE
  - FINISH:
    - 2.1 CONTACT: GOLD FLASH PLATING OVERALL. 1.27  $\mu\text{m}$  (50  $\mu\text{in}$ ) MIN. NICKEL UNDERPLATING OVERALL.
    - 3. REFLOW SOLDER CAPABLE TO 260°C PER TEC-109-201, CONDITION B.
- $\Delta$  WITHOUT DATE CODE FOR 8 POSITION UNDER.

	-37	41.40	45.6	39.0	40	4	1734248-0
	-36	40.40	44.6	38.0	39	3	1734248-9
	-35	39.40	43.6	37.0	38	3	1734248-8
	-34	38.40	42.6	36.0	37	3	1734248-7
	-33	37.40	41.6	35.0	36	3	1734248-6
	-32	36.40	40.6	34.0	35	3	1734248-5
	-31	35.40	39.6	33.0	34	3	1734248-4
	-30	34.40	38.6	32.0	33	3	1734248-3
	-29	33.40	37.6	31.0	32	3	1734248-2
	-28	32.40	36.6	30.0	31	3	1734248-1
	27	31.40	35.6	29.0	30	3	1734248-0
	26	30.40	34.6	28.0	29	2	1734248-9
	25	29.40	33.6	27.0	28	2	1734248-8
	24	28.40	32.6	26.0	27	2	1734248-7
	23	27.40	31.6	25.0	26	2	1734248-6
	22	26.40	30.6	24.0	25	2	1734248-5
	21	25.40	29.6	23.0	24	2	1734248-4
	-20	24.40	28.6	22.0	23	2	1734248-3
	19	23.40	27.6	21.0	22	2	1734248-2
	18	22.40	26.6	20.0	21	2	1734248-1
	17	21.40	25.6	19.0	20	2	1734248-0
	16	20.40	24.6	18.0	19	1	1734248-9
	15	19.40	23.6	17.0	18	1	1734248-8
	14	18.40	22.6	16.0	17	1	1734248-7
	13	17.40	21.6	15.0	16	1	1734248-6
	12	16.40	20.6	14.0	15	1	1734248-5
	11	15.40	19.6	13.0	14	1	1734248-4
	10	14.40	18.6	12.0	13	1	1734248-3
	9	13.40	17.6	11.0	12	1	1734248-2
	8	12.40	16.6	10.0	11	1	1734248-1
	7	11.40	15.6	9.0	10	1	1734248-0
	6	10.40	14.6	8.0	9		1734248-9
	5	9.40	13.6	7.0	8		1734248-8
	4	8.40	12.6	6.0	7		1734248-7
	3	7.40	11.6	5.0	6		1734248-6
	2	6.40	10.6	4.0	5		1734248-5
	2	5.40	9.6	3.0	4		1734248-4
	2	4.40	8.6	2.0	3		1734248-3
	DIM D	DIM C	DIM B	DIM A	POS.		PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	$\pm$	-
1 PLC	$\pm$	0.3
2 PLC	$\pm$	0.2
3 PLC	$\pm$	-
4 PLC	$\pm$	-
4 PLC ANGLES	$\pm$	3'

MATERIAL: SEE NOTE

FINISH: SEE NOTE

DWN: H. HUANG 30MAR2007

CHK: S. HOU 30MAR2007

APVD: W.J. KE 30MAR2007

PRODUCT SPEC: 108-57080

APPLICATION SPEC:

WEIGHT: -

CUSTOMER DRAWING

NAME: 1.0 MM FPC, ZIF VERTICAL, SMT TYPE

SIZE: A3

CAGE CODE: 00779

DRAWING NO: C=1734248

RESTRICTED TO: -


SCALE: -

SHEET: 1 of 2


REV: E

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT 2011 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


LOC		DIST		REVISIONS				
DW		P	LTR	DESCRIPTION	DATE	DWN	APVD	
				SEE SHEET 1.				

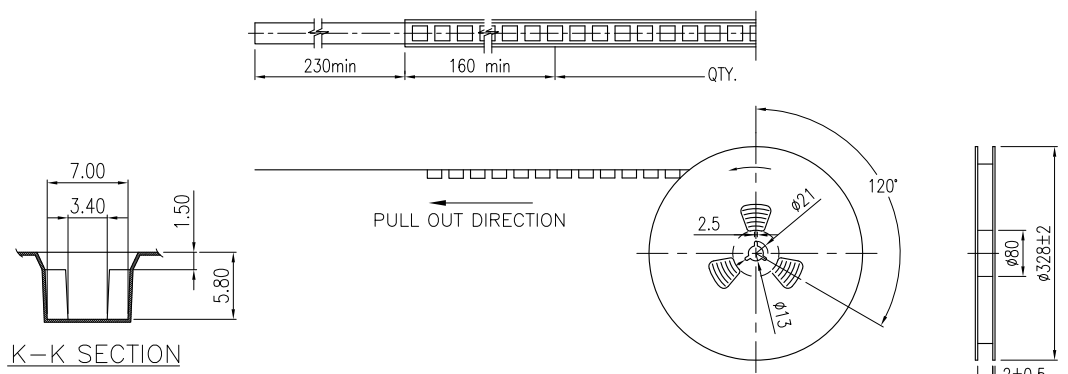

- NOTES:  
 1. MATERIAL :  
 1.1 EMBOSSED CARRIER: PS  
 1.2 COVER TAPE: PS  
 1.3 SHIPPING CARTON: CORRUGATED FIBER  
 2. DIMENSION :  
 2.1 REEL: W= DIM C  
 2.2 SHIPPING BOX: L=350, W=350, H=350  
 3. QUANTITY: PRIMARY PACKING: 1000 PCS/REEL  
 4. PEELING RESISTANCE: 10.2gf~71.4gf.  
 5. PEELING SPEED: 300mm/minutes.

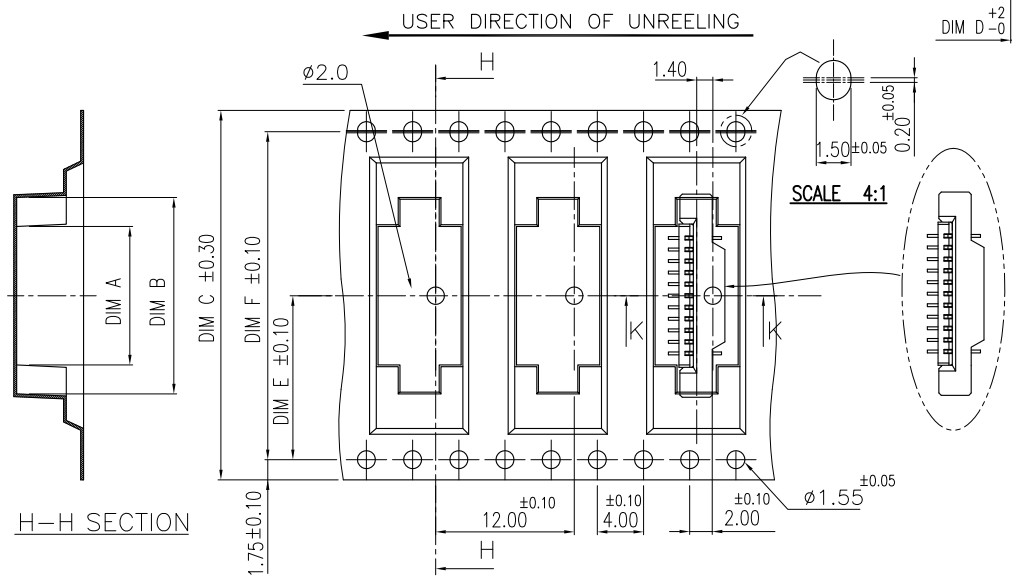

REELS/BOX	DIM F	DIM E	DIM D	DIM C	DIM B	DIM A	G/W (kg)	N/W (kg)	POS.	PART NUMBER
4	68.4	34.2	72.4	72	-46	41	8.70	5.50	40	4-1734248-0
					-45	40	8.57	5.37	39	3-1734248-9
					-44	39	8.45	5.25	38	3-1734248-8
					-43	38	11.60	7.68	37	3-1734248-7
					-42	37	11.40	7.48	36	3-1734248-6
					-41	36	11.21	7.29	35	3-1734248-5
					-40	35	11.02	7.10	34	3-1734248-4
					-39	34	10.83	6.91	33	3-1734248-3
					-38	33	10.63	6.71	32	3-1734248-2
					-37	32	10.44	6.52	31	3-1734248-1
					36	31	10.25	6.33	30	3-1734248-0
					35	30	10.06	6.14	29	2-1734248-9
					34	29	9.86	5.94	28	2-1734248-8
					33	28	9.67	5.75	27	2-1734248-7
					32	27	9.00	5.56	26	2-1734248-6
					31	26	8.80	5.36	25	2-1734248-5
					30	25	8.61	5.17	24	2-1734248-4
					-29	24	8.42	4.98	23	2-1734248-3
					28	23	8.23	4.79	22	2-1734248-2
					27	22	8.03	4.59	21	2-1734248-1
					26	21	7.84	4.40	20	2-1734248-0
					25	20	7.65	4.21	19	1-1734248-9
					24	19	7.46	4.02	18	1-1734248-8
					23	18	7.26	3.82	17	1-1734248-7
					22	17	7.07	3.63	16	1-1734248-6
					21	16	9.20	5.16	15	1-1734248-5
					20	15	8.91	4.87	14	1-1734248-4
					19	14	8.62	4.58	13	1-1734248-3
					18	13	8.33	4.29	12	1-1734248-2
					17	12	8.04	4.00	11	1-1734248-1
					16	11	7.73	4.13	10	1-1734248-0
					15	10	7.41	3.81	9	1734248-9
					14	9	7.08	3.48	8	1734248-8
					13	8	6.76	3.16	7	1734248-7
					12	7	6.44	2.84	6	1734248-6
					11	6	6.12	2.52	5	1734248-5
					10	5	5.80	2.20	4	1734248-4
					9	4	5.48	1.88	3	1734248-3

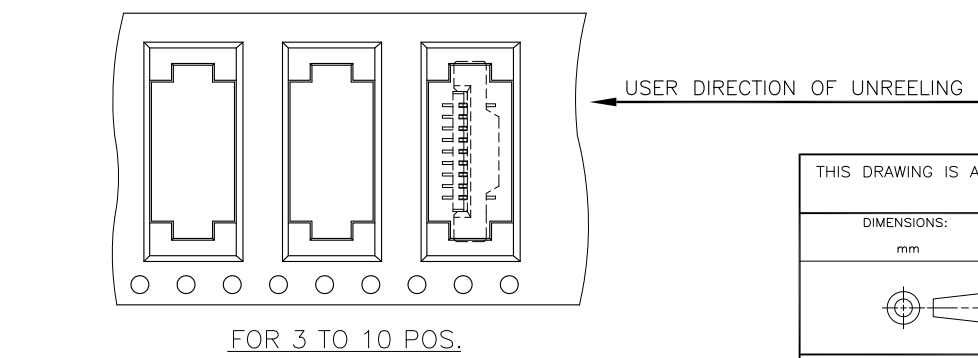

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±
1 PLC	±0.3
2 PLC	±0.2
3 PLC	±0.15
4 PLC	±
ANGLES	± 3'

MATERIAL: \_\_\_\_\_ FINISH: \_\_\_\_\_

STE TE Connectivity

1.0 MM FPC, ZIF VERTICAL, SMT TYPE

SIZE: A3 CAGE CODE: 00779 DRAWING NO: ©=1734248 RESTRICTED TO: \_\_\_\_\_

CUSTOMER DRAWING SCALE: \_\_\_\_\_ SHEET: 2 of 2 REV: E