


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
G	14		L	REVISED PER 0G3A-0777-03	09DEC03	JR	MJS

AMP PART NUMBER	PACKAGE TYPE	QTY
8-321600-2	LOOSE PIECE, BOX	50
8-321600-5	LOOSE PIECE, BAG	10

AMP WIRE RANGE	Listed FILE E13288
2 AWG SOLID OR STRANDED	2 AWG STRANDED
LR7189 Certified	MILITARY P/N AND CLASS
2 AWG SOLID OR STRANDED	MS 20659-114 CLASS 2

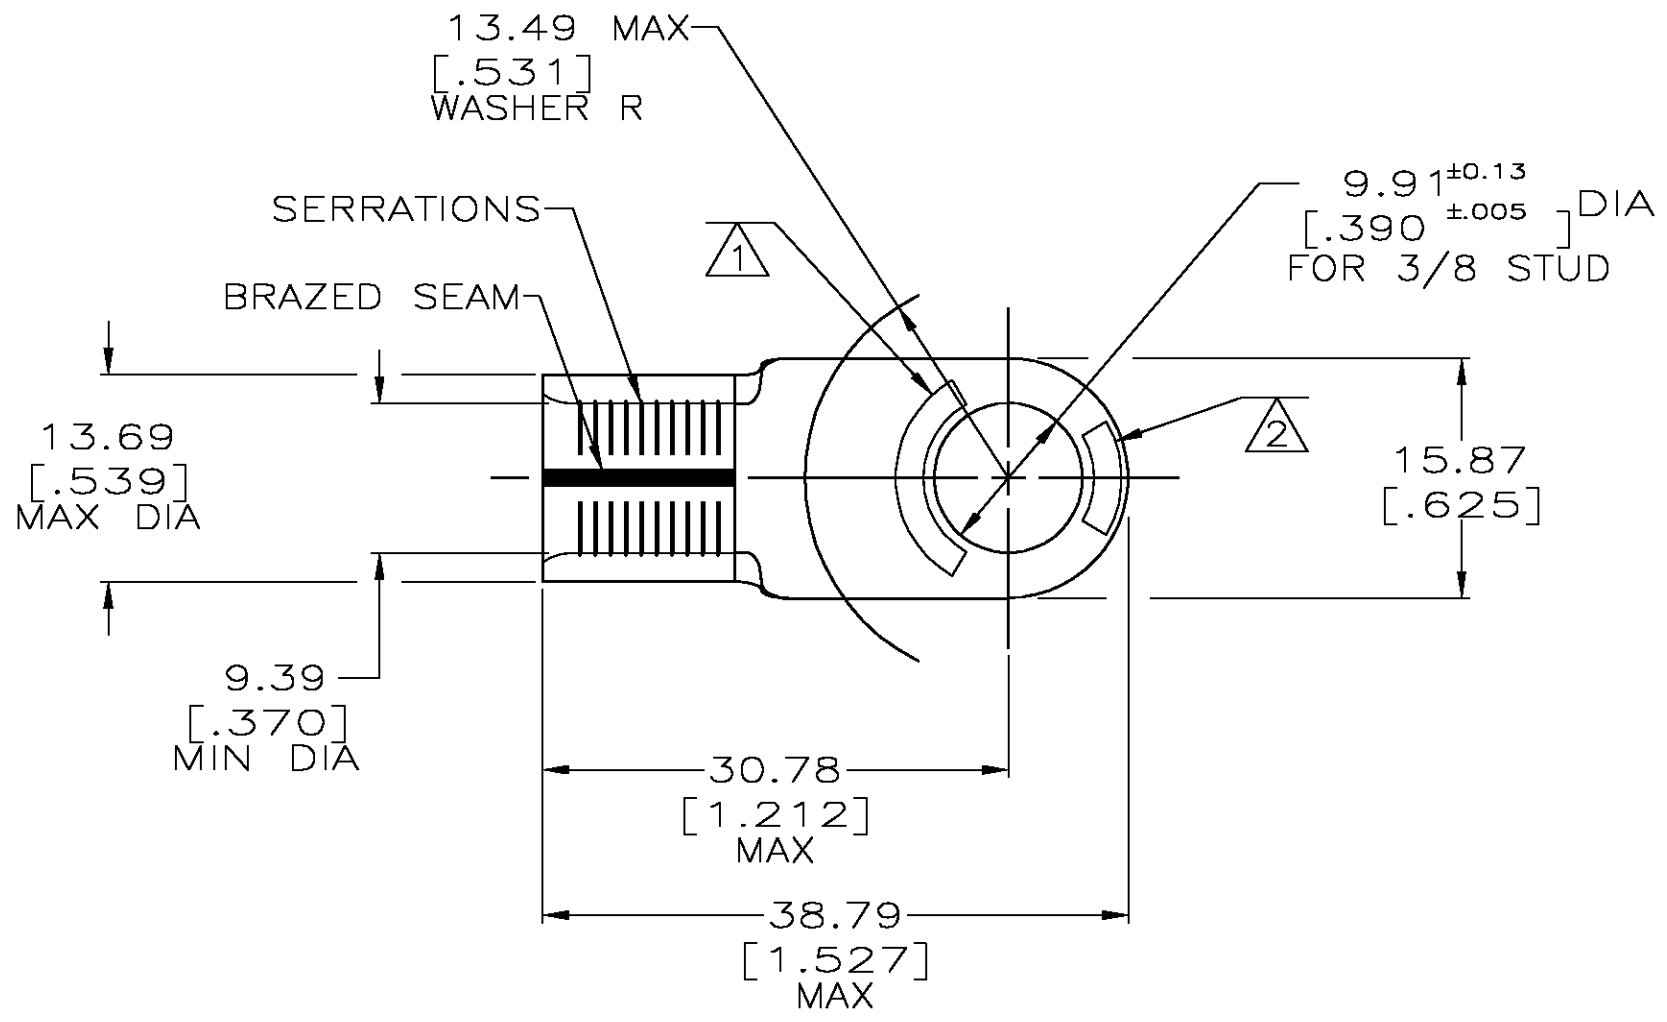

- STAMP AMP 2W* APPROX AS SHOWN
- STAMP 60-75 APPROX AS SHOWN
- MATERIAL THK: 1.78 ±0.08 [.070 ±0.003]
- TIN PLATE 0.00254 [.000100] MIN THK PER ASTM B-545
- GOLD PLATE 0.00127 [.000050] MIN THK PER ASTM B-488, TYPE II

	2-321600-1
	321600
FINISH	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 170° C	THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DK SCHRUM 5/25/93	tyco Electronics		Tyco Electronics Corporation City, State, Zip	
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: N/A	DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK RD HEIM 1/27/94	NAME J MECKLEY 1/27/94			
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	CIRCULAR MIL AREA: 26.7-42.4mm ² [52,600-83,700] SOLID OR STRANDED		0 PLC ± - 1 PLC ± - 2 PLC ± 0.20[.008] 3 PLC ± - 4 PLC ± - ANGLES ± -	APVD J MECKLEY 1/27/94	PRODUCT SPEC APPLICATION SPEC			
FOR ORDER ENTRY	1-800-526-5142	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.	MATERIAL COPPER ASTM B-152	FINISH SEE TABLE	WEIGHT -	SIZE A3	CAGE CODE 00779	DRAWING NO C-321600	RESTRICTED TO -
AMP 1470-19 REV 31MAR2000					CUSTOMER DRAWING				
					SCALE 2:1	SHEET 1 OF 1		REV L	