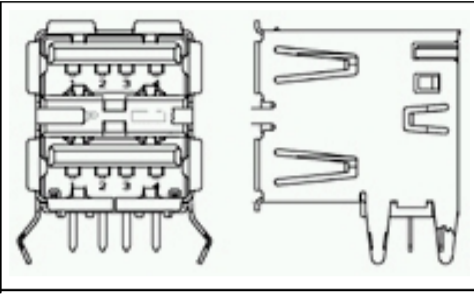


5787745 -1 Product Details


Live Product Chat US Only
 8:30am - 5pm ET, Mon - Fri

5787745 -1
 [Active](#)

Universal Serial Bus (USB) Connectors

[Always EU RoHS/ELV Compliant](#) ([Statement of Compliance](#))

Product Highlights:

- ? USB Type = Standard
- ? A Series
- ? Receptacle
- ? 2 Ports
- ? Right Angle Mount Orientation

[View all Features](#) | [Find Similar Products](#)
Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

Documentation & Additional Information

Product Drawings:

- ? [RECEPTACLE ASSEMBLY, RIGHT ANGLE, STACKED, THRU - HOLE, USB](#) (PDF, English)

Catalog Pages/Data Sheets:

- ? None Available

Product Specifications:

- ? None Available

Application Specifications:

- ? None Available

Instruction Sheets:

- ? None Available

CAD Files:

- ? None Available

Additional Information:

- ? [Product Line Information](#)

Related Products:

- ? [Tooling](#)

[List all Documents](#)

Product Features

(Please use the Product Drawing for all design activity)

Product Type Features:

- ? Gender = Receptacle
- ? Number of Ports = 2
- ? [PCB Mount Style](#) = Thru Hole
- ? PCB Thickness (mm [in]) = 1.57 [0.062]

Electrical Characteristics:

- ? Panel Ground Type = Spring Finger

Termination Related Features:

- ? Termination (Solder) Post Length (mm [in]) = 2.84 [0.112]

Body Related Features:

- ? [Series](#) = A
- ? Mount Orientation = Right Angle
- ? [Panel Ground](#) = With
- ? Shell Plating = Tin over Copper

Contact Related Features:

- ? [Contact Mating Area Plating Material](#) = Gold Flash over Palladium Nickel or Gold (30) over Nickel
- ? Contact Material = Copper Alloy

Housing Related Features:

- ? [Housing Color](#) = Black
- ? Housing Material = Thermoplastic
- ? Housing Flammability Rating = UL 94V -0

Industry Standards:

- ? [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- ? [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- ? RoHS/ELV Compliance History = Always was RoHS compliant

Conditions for Usage:

- ? USB Type = Standard

Packaging Related Features:

- ? Panel Ground Location = Middle
- ? [Packaging Method](#) = Box

Other:

- ? Brand = AMP