


1825203-2 Product Details

[Live Product Chat](#)

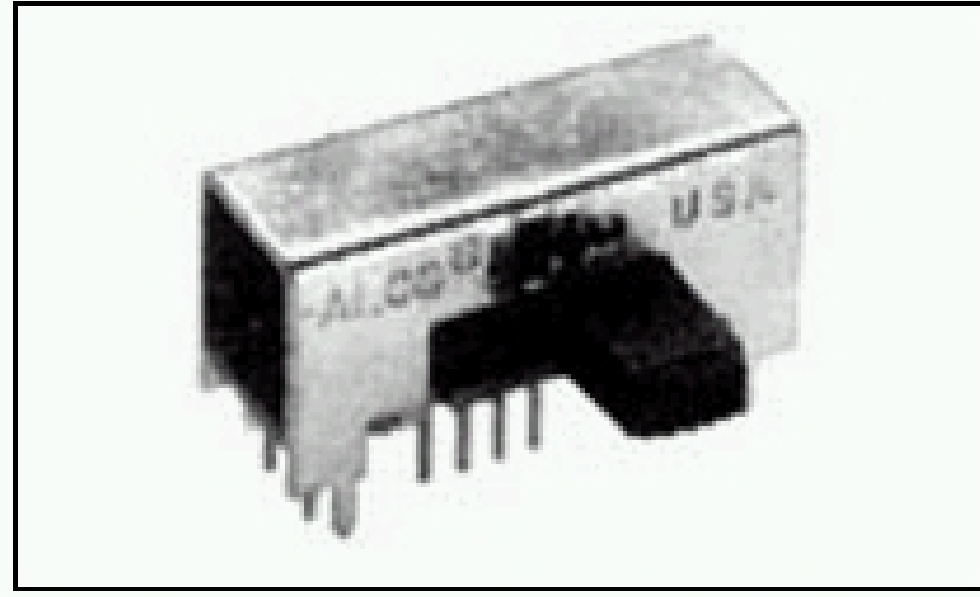

1825203-2

TE Part Number: 1825203-2

✓ Active

[Add to Part List](#)

Slide Switches

Always EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:

- Number of Positions = 3
- Three Pole - Three Throw Configuration (Pole-Throw)
- Actuator Style = Extended, Side
- Actuator Color = Black
- MSSA Series

[View all Features](#) | [Find Similar Products](#)

Quick Links

- ▶ [Check Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

Documentation & Additional Information

Product Drawings:

- [SLIDE SWITCH, 3 POS. \(MSSA-3350R SERIES\)](#) (PDF, English)

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files:

- None Available

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- [Number of Positions](#) = 3
- Configuration (Pole-Throw) = Three Pole - Three Throw
- Actuator Style = Extended, Side
- Mount Angle = Vertical
- Grade = Instrumentation
- Termination Type = PC
- PCB Retention Feature = Yes

Electrical Characteristics:

- Contact Rating = 0.4 VA max @ 20 VDC or peak AC

Body Related Features:

- Actuator Color = Black
- Series = MSSA
- Mount Style = Through-Hole
- PCB Tail Length (mm [in]) = 3.51 [0.136]
- PCB Retention Method = Guide Posts
- Actuator Length (mm [in]) = 9.02 [0.355]
- Actuator Material = Polyester
- Flammability Rating = UL 94V-0
- Actuator Travel = 2.50 [.098]

Contact Related Features:

- Contact Plating = Gold

Configuration Related Features:

- Terminal Configuration = Standard
- Number of Actuators = Single

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- RoHS/ELV Compliance History = Always was RoHS compliant

Identification Marking:

- Stamped Marking = With

Other:

- Brand = Alcoswitch