



## UHF Connectors, Miniature

### Plugs, Crimp

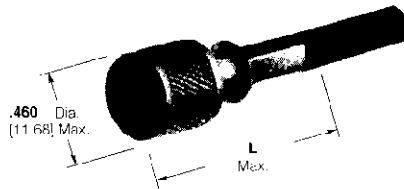

Nickel Plating


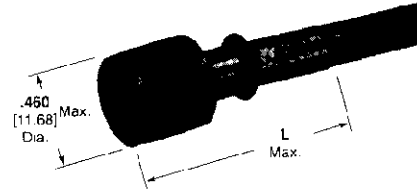


Black Conductive

Connector Cable Range Selection Code†	RG/U Cable	Termination Type	Center Contact Plating	Body Plating	Dielectric	Part No.	Dim. L	Integral Die Hand Tool	Die Insert for Tools: Hand Tool-69710-1 Pneu.-69365, 69365-3	Dies for AMP-O-LECTRIC Machine 220152-1
D	58, 58A, 58B, 58C	Dual Crimp	Tin	Nickel	Polypropylene	<b>226600-1</b>	<b>1.140</b> 28.96	220149-1	58158-1	220162-1
		Dual Crimp	Tin	Black Conductive	Polypropylene	<b>226600-8</b>	<b>1.140</b> 28.96	220149-1	58158-1	220162-1
E1	142, 223, 400	Dual Crimp	Tin	Nickel	Polypropylene	<b>228664-2</b>	<b>1.140</b> 28.96	—	—	—
B	174, 188, 316	Dual Crimp	Tin	Nickel	Polypropylene	<b>414938-2</b>	<b>1.140</b> 28.96	—	—	—

†Refer to pages 14 and 15 for code specifications.

### Jacks, Crimp

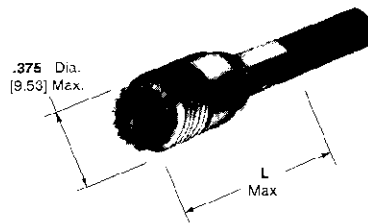

(Stamped and Formed Contacts  
P/Ns **414478-2** & **226853-2**  
for use with P/Ns **414477-1** &  
**226849-1** Respectively)

Connector Cable Range Selection Code†	RG/U Cable	Termination Type	Center Contact Plating	Body Plating	Dielectric	Part No.	Dim. L	Integral Die Hand Tool	Die Insert for Tools: Hand Tool-69710-1 Pneu.-69365, 69365-3	Dies for AMP-O-LECTRIC Machine 220152-1
B	316	Dual Crimp	Gold	Nickel	Polymethyl-pentene	<b>414477-1***</b>	<b>1.185</b> 30.1	—	58159-1	—
D	58, 58A, 58B, 58C	Dual Crimp	Tin	Nickel	Polypropylene	<b>226602-1</b>	<b>1.185</b> 30.1	220149-1 58124-1**	58158	220162-1
		Dual Crimp	Tin	Nickel	Polypropylene	<b>226849-1*</b>	<b>1.185</b> 30.1	—	—	—

†Refer to pages 14 and 15 for code specifications.

\*Connector to body and ferrule only. For volume production, order stamped and formed center contact **226853-2** (illustrated above).

To terminate stamped and formed center contact, use AMP-O-LECTRIC Machine **565435-5** with Applicator **466689-2**. To terminate the ferrule use AMP-O-LECTRIC Machine **220152-1** with dies **220162-1**.

\*\*Economy hand tool does not have CERTI-CRIMP ratchet feature.

\*\*\*To terminate stamped and formed center contact **414478-2** use AMP-O-LECTRIC machine **565435-5** with applicator **567386-2**.

Miniature and Standard  
UHF Connectors