


RECOMMENDED P.C. BOARD HOLE LAYOUT

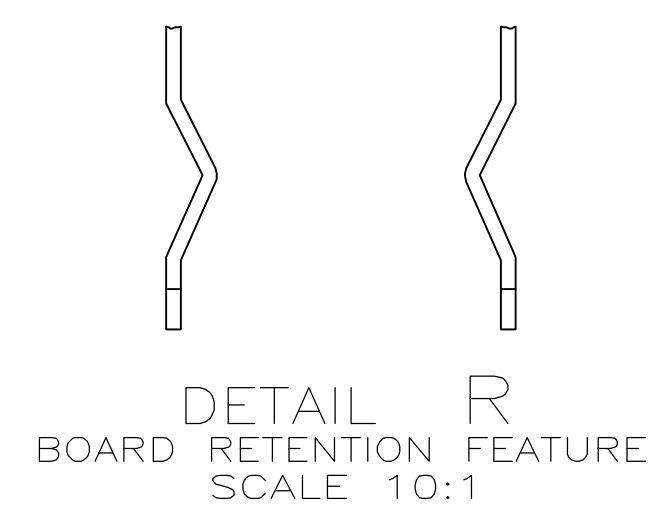

- 1 AMP, CSA, and DATE CODE WITH .062 ± 0.015 HIGH CHARACTERS WHERE SIZE PERMITS.
- 2 HOUSING: 1-70 POSITION SIZES MAY BE PPS, GLASS-FILLED OR PCT, GLASS-FILLED, POSITION SIZES GREATER THAN 70 WILL BE PPS, GLASS-FILLED.
- 3 CONTACT: PHOSPHOR BRONZE.
- 4 CONTACT FINISH: DUPLEX PLATED 0.00076 [.000030] GOLD IN CONTACT AREA, 0.00127-0.00254 [.000050-.000100] BRIGHT TIN-LEAD ON SOLDER TAILS, ALL OVER 0.00127 [.000050] NICKEL.
- 5 THESE DIMENSIONS PERTAIN TO CAVITY C'S ONLY, NOT TO CONTACT LOCATIONS.
- 6 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE CONTACT BEAMS).
- 7. CSA LOGO INK STAMPED WHITE ON HOUSING.
- 8 PRELIMINARY PART - NOT RELEASED FOR PRODUCTION
- 9 CONTACT FINISH: DUPLEX PLATED 0.00076 [.000030] GOLD IN CONTACT AREA, 0.00127-0.00254 [.000050-.000100] MATTE TIN ON SOLDER TAILS, ALL OVER 0.00127 [.000050] NICKEL.
- 10 ROHS 2002/95/EC COMPLIANT.

9	1, 4	1, 4	16.71 [.658]	3	8	7-534204-2
	1, 3	1, 3	14.17 [.558]	2	6	7-534204-1
	1, 2, 50, 51, 99, 100	1, 2, 50, 51, 99, 100	260.55 [10.258]	99	200	7-534204-0
	1, 2, 40, 41, 79, 80	1, 2, 40, 41, 79, 80	209.75 [8.258]	79	160	6-534204-9
	1, 2, 35, 36, 69, 70	1, 2, 35, 36, 69, 70	184.35 [7.258]	69	140	6-534204-8
	1, 2, 32, 33, 64, 65	1, 2, 32, 33, 64, 65	171.65 [6.758]	64	130	6-534204-7
	1, 2, 27, 28, 54, 55	1, 2, 27, 28, 54, 55	146.25 [5.758]	54	110	6-534204-6
	1, 2, 47, 48	1, 2, 47, 48	128.47 [5.058]	47	96	6-534204-5
	1, 2, 35, 36	1, 2, 35, 36	97.99 [3.858]	35	72	6-534204-4
	1, 2, 34, 35	1, 2, 34, 35	95.45 [3.758]	34	70	6-534204-3
	1, 2, 19, 20	1, 2, 19, 20	57.35 [2.258]	19	40	6-534204-2
	1, 2, 11, 12	1, 2, 11, 12	37.03 [1.458]	11	24	6-534204-1
	1, 2, 7, 8	1, 2, 7, 8	26.87 [1.058]	7	16	6-534204-0
	1, 2, 9, 10	1, 2, 9, 10	31.95 [1.258]	9	20	5-534204-9
	1, 2, 39, 40	1, 2, 39, 40	108.15 [4.258]	39	80	5-534204-8
	1, 2, 30, 31, 59, 60	1, 2, 30, 31, 59, 60	158.95 [6.258]	59	120	5-534204-7
	1, 2, 25, 26, 49, 50	1, 2, 25, 26, 49, 50	133.55 [5.258]	49	100	5-534204-6
	1, 2, 29, 30	1, 2, 29, 30	82.75 [3.258]	29	60	5-534204-5
	1, 2, 14, 15	1, 2, 14, 15	44.65 [1.758]	14	30	5-534204-4
	1, 2, 17, 18	1, 2, 17, 18	52.27 [2.058]	17	36	5-534204-3
1, 2, 5, 6	1, 2, 5, 6	21.79 [.858]	5	12	5-534204-2	
1, 2, 24, 25	1, 2, 24, 25	70.05 [2.758]	24	50	5-534204-1	
4	1, 4	1, 4	16.71 [.658]	3	8	2-534204-2
	1, 3	1, 3	14.17 [.558]	2	6	2-534204-1
	1, 2, 50, 51, 99, 100	1, 2, 50, 51, 99, 100	260.55 [10.258]	99	200	2-534204-0
	1, 2, 40, 41, 79, 80	1, 2, 40, 41, 79, 80	209.75 [8.258]	79	160	1-534204-9
	1, 2, 35, 36, 69, 70	1, 2, 35, 36, 69, 70	184.35 [7.258]	69	140	1-534204-8
	1, 2, 32, 33, 64, 65	1, 2, 32, 33, 64, 65	171.65 [6.758]	64	130	1-534204-7
	1, 2, 27, 28, 54, 55	1, 2, 27, 28, 54, 55	146.25 [5.758]	54	110	1-534204-6
	1, 2, 47, 48	1, 2, 47, 48	128.47 [5.058]	47	96	1-534204-5
	1, 2, 35, 36	1, 2, 35, 36	97.99 [3.858]	35	72	1-534204-4
	1, 2, 34, 35	1, 2, 34, 35	95.45 [3.758]	34	70	1-534204-3
	1, 2, 19, 20	1, 2, 19, 20	57.35 [2.258]	19	40	1-534204-2
	1, 2, 11, 12	1, 2, 11, 12	37.03 [1.458]	11	24	1-534204-1
	1, 2, 7, 8	1, 2, 7, 8	26.87 [1.058]	7	16	1-534204-0
	1, 2, 9, 10	1, 2, 9, 10	31.95 [1.258]	9	20	534204-9
	1, 2, 39, 40	1, 2, 39, 40	108.15 [4.258]	39	80	534204-8
	1, 2, 30, 31, 59, 60	1, 2, 30, 31, 59, 60	158.95 [6.258]	59	120	534204-7
	1, 2, 25, 26, 49, 50	1, 2, 25, 26, 49, 50	133.55 [5.258]	49	100	534204-6
	1, 2, 29, 30	1, 2, 29, 30	82.75 [3.258]	29	60	534204-5
	1, 2, 14, 15	1, 2, 14, 15	44.65 [1.758]	14	30	534204-4
	1, 2, 17, 18	1, 2, 17, 18	52.27 [2.058]	17	36	534204-3
1, 2, 5, 6	1, 2, 5, 6	21.79 [.858]	5	12	534204-2	
1, 2, 24, 25	1, 2, 24, 25	70.05 [2.758]	24	50	534204-1	
FINISH	ROW M	ROW N	B	A	NO OF POSN	PART NUMBER
	POSITION WITH BOARD RETENTION					

OBSOLETE
OBSOLETE

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T. HOFFMAN 4/29/96	Tyco Electronics Corporation Harrisburg, PA 17105-3608
DIMENSIONS: INCHES		CHK A. GABANY 5/7/96	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD - NAME	PRODUCT SPEC
0 PLC ± -			APPLICATION SPEC
1 PLC ± -			SIZE CAGE CODE DRAWING NO RESTRICTED TO
2 PLC ± 0.13 [003]			A1 00779 534204
3 PLC ± -			WEIGHT
4 PLC ± -			CUSTOMER DRAWING
ANGLES ± -			SCALE 6:1 SHEET 1 OF 1 REV S1