

DO NOT SCALE

DIMENSIONS IN mm

METRIC



THIRD ANGLE

PROJECTION



P.C.B. HOLE DIM. ACTION PIN

DRILLED HOLE	:1,60 ±0,025 mm
FIN. HOLE	:1,39 to 1,54 mm
AFTER REFLOW	:1,37 to 1,54 mm
Cu-thks	:0,025 to 0,075 mm
SnPb-thks	:0,004 to 0,010 mm

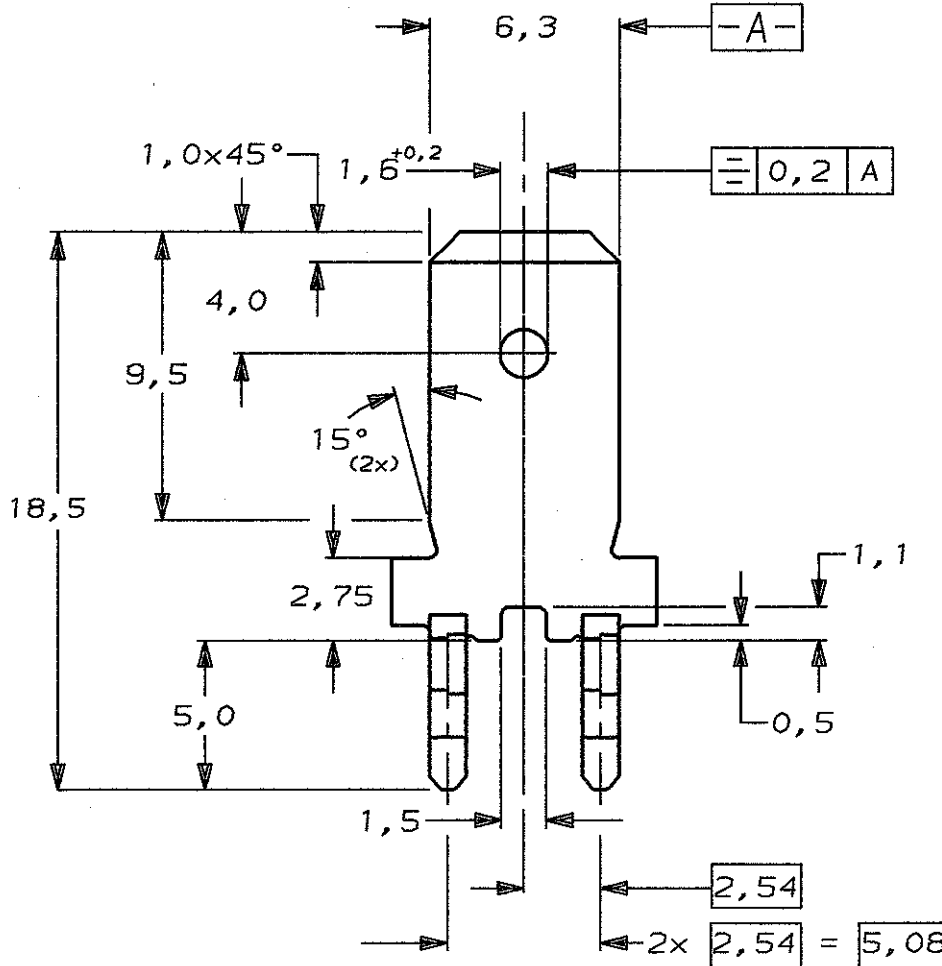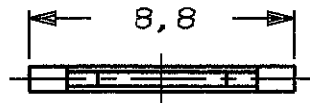

2,54µM MIN. SNPB (93/7) ALL OVER.

PHOSPHORBRONZE

216926-1

FINISH

MATERIAL

PARTNUMBER

CUSTOMER DRAWING



AMP-HOLLAND B.V.

's-Hertogenbosch, The Netherlands.

FOR REFERENCE ONLY WILL NOT BE UPDATED

THIS DRAWING IS UNPUBLISHED RELEASED FOR PUBLICATION 19-

© COPYRIGHT 19- BY AMP-HOLLAND B.V. ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENTS AND/OR PATENTS PENDING.

DR. S.MEEUWSEN DATE 01-03-90

WIRE RANGE -

NAME

.250'' SERIES TAB WITH ACTION PIN, FOR POSITIVE LOCK RECEPTACLE. (1,6-3,2 P.C.BOARD THK'S). LOOSE PIECE VERSION.

REV. DATE D M Y

CHK. R.V.LOKVEN DATE 03-04-90

INSUL. RANGE -

19 02 91

APP. L.V.SOEST. DATE 03-04-90

SIZE A4

SHEET 1 OF 1

DWG. No.

C-216926

REV. LTR.

B